



LIGHTING EVERY SPACE,
INSIDE AND OUTSIDE



ABOUT US

Tirich LED is a premium LED lighting manufacturer specializing in architectural and interior lighting solutions. Established in 2021, the company is driven by a vision to deliver innovative, aesthetically refined, and high-performance lighting products for modern spaces.

Backed by 20 years of lighting industry experience and 5 years of manufacturing expertise, Tirich LED develops premium indoor lighting solutions that combine superior illumination, reliability, and elegant design. Our product range is thoughtfully crafted to meet the evolving requirements of architects, interior designers, consultants, and lighting professionals.

Operating through a strong B2B network, we supply our products to dealers and distributors across India, ensuring consistent quality, dependable service, and timely delivery. At Tirich LED, we are committed to setting new benchmarks in architectural lighting through innovation, precision manufacturing, and customer-focused solutions.



VISION

"Our vision is to become one of India's top five preferred LED lighting brands for the architecture and interior design industry by 2030. We are committed to delivering innovative, high-quality, and energy-efficient lighting solutions that inspire exceptional spaces, empower creative design, and set new standards of excellence in the lighting sector."



MISSION

Our mission at Tirich LED is twofold: to provide fast and superior service to our clients and to adapt our selves according to their requirements seamlessly. We prioritize responsiveness, efficiency, and flexibility to ensure that our clients' needs are met with precision and satisfaction. Furthermore, we are dedicated to offering cost-effective solutions without compromising on the premium quality of our raw materials. Our mission is to deliver exceptional value to our customers while upholding the highest standards of quality and service excellence.

01. COB LIGHTS



PRO - 116
Pg. 15




PRO - 125
Pg. 16



PRO - 120
Pg. 17



PRO - 126
Pg. 18



TLC - 109
Pg. 19



TLC - 111
Pg. 20



TLC - 115
Pg. 21



TLC - 107
Pg. 23



TLC - 101-B
Pg. 24



TLC - 105
Pg. 25



TLC - 159
Pg. 26



TLC - 102 (Curvecob)
Pg. 27



TLC - 103
Pg. 28



TLC - 113
Pg. 31



TLC - 112
Pg. 32



TLC - 335
Pg. 33



TLC - 119
Pg. 34



TLC - 114
Pg. 36



PRO +142
Pg. 37



PRO +141
Pg. 38



TLC - 110
Pg. 39



TLC - 118
Pg. 40



TLC - 108
Pg. 42



PRO +130
Pg. 43



PRO +013
Pg. 44



PRO +133
Pg. 45



PRO +131
Pg. 46



PRO +132
Pg. 47



PRO -127
Pg. 48



PRO -140
Pg. 50



TLC - 004
Pg. 51



TLC - 129
Pg. 52



PRO - 128
Pg. 53



TLC -101 (Flavacob)
Pg. 54



TLC - 106
Pg. 55



PRO - 117
Pg. 56

02. DOWN LIGHTS



03. LAZER LIGHTS



TLC - 154
Pg. 67



TLC - 153
Pg. 68



TLC - 152 (Magik)
Pg. 69



TLC - 151 (linea Lazar)
Pg. 70



PRO - 014
Pg. 71



PRO - 054
Pg. 72

04. TRACK LIGHTS



PRO - 75
Pg. 75



PRO - 123
Pg. 76



TLC - 121
Pg. 77

05. SURFACE LIGHTS



PRO - 210
Pg. 81



TLC - 208
Pg. 82



PRO - 209
Pg. 83



TLC - 207
Pg. 84



TLC - 201
Pg. 85



TLC - 206
Pg. 86



TLC - 205
Pg. 88



TLC - 203
Pg. 89



TLC - 155
Pg. 90



PRO - 230
Pg. 91



TLC - 444
Pg. 93



PRO - 232
Pg. 94



PRO - 052
Pg. 96



PRO - 226
Pg. 97



PRO - 089
Pg. 100

06. MAGNETIC RANGE



MAGNETIC LAZER
Pg. 103




MAGNETIC MOVEABLE Pg.104



TRACK
Pg. 105



CASET LAZER
Pg. 107



PROFLIE
Pg. 108



POWER SUPPLY
Pg. 109



COUNCIL CORNER
Pg. 110




HANGING LIGHT
Pg. 112



CYLINDER
Pg. 113




PROFILE WALL WASHER Pg. 115




L CORNER
Pg. 116


07. OUTDOOR LIGHTS



TLC-211/212
Pg. 119



**TLC-213/214
/215** Pg. 120



PRO - 217
Pg. 122




TLC - 218 (Flood Light)
Pg. 123



TLC - 219
Pg. 124



TLC - 221 (Spike Light)
Pg. 126



TLC - 222
Pg. 127



TLC - 223
Pg. 128



PRO - 224
Pg. 129



TLC - 216
Pg. 131



TLC - 220
Pg. 132



TLC - 225
Pg. 133

08. 10MM MEGNETIC



10Z CYLINDER
Pg. 137



10Z TRACK
Pg. 138



10Z PFL (PROFILE) Pg.139



10Z LZR (LAZER) Pg.140



10Z SUPPLY
Pg. 142



10Z CASETLZR
Pg. 143



10Z TRACK
Pg. 144



10Z CORNER
Pg. 145



10Z CONNECTOR
Pg. 146

09. ACCESSORIES




SMART REMOTE
Pg. 148




CURVEEL CORNER Pg.149



TRACK RAIL
Pg. 150




MAGNETIC CHANNEL Pg.151

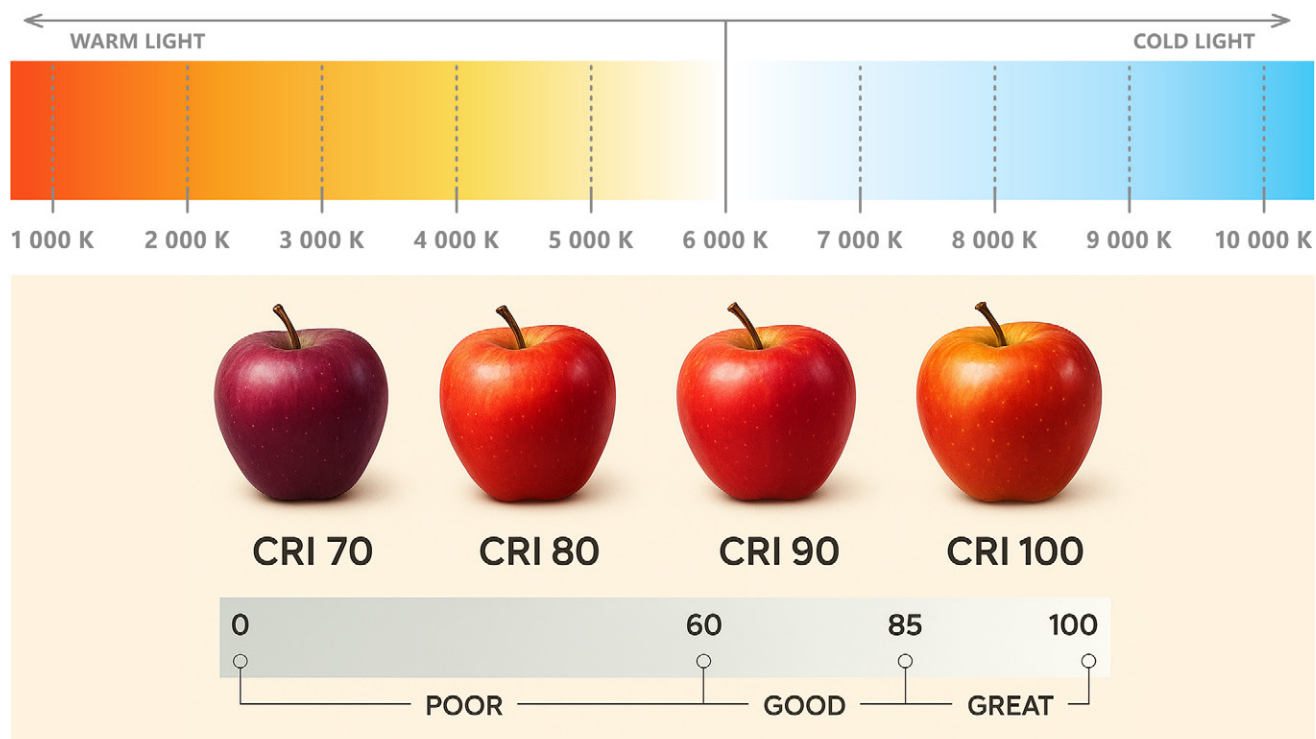

Lighting quality isn't just brightness. it's how colors truly appear. A higher CRI reveals natural, vibrant, and accurate colors. Warm to cool temperature shifts define the ambience of a space. CRI 70 shows muted tones, while CRI 100 delivers perfect color clarity. Choosing the right CRI and Kelvin level transforms your visual experience. Better lighting means better detail, better mood, and better design.

Tirich LED — Lighting engineered for true color and perfect ambience.


COLOR TEMPERATURE DISPLAY

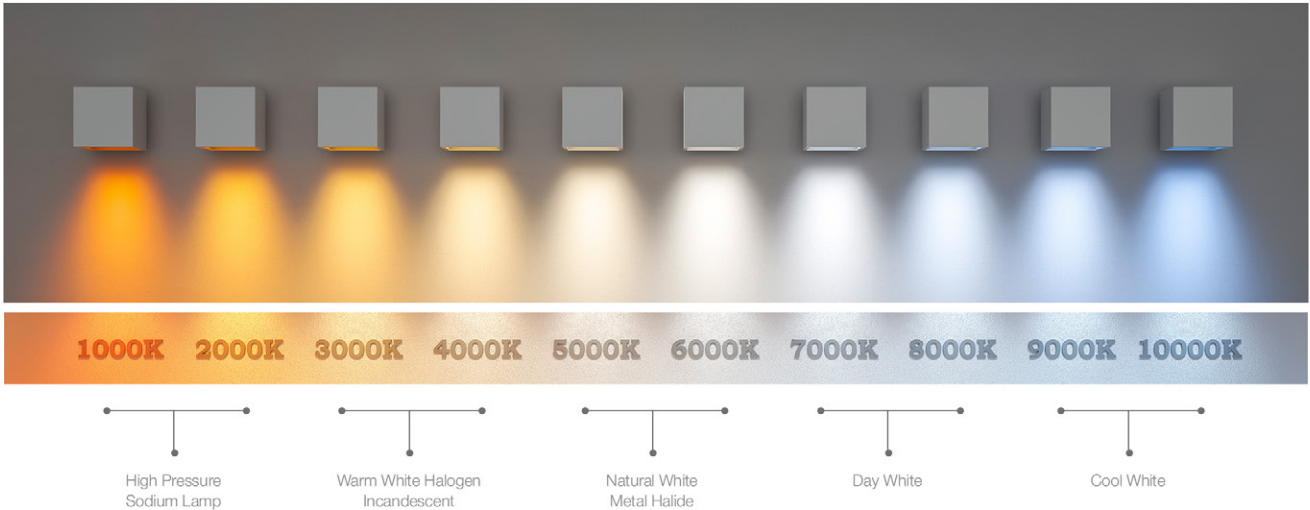

Lighting isn't just brightness. it's emotion, ambience, and visual comfort. From the warm glow of 1000K to the crisp clarity of 10000K, each color temperature transforms the mood of your space.

Tirich LED brings you the complete spectrum of illumination, designed for homes, offices, and architectural projects. Choose warmth, choose coolness, choose perfection because every environment deserves the right light. Tirich LED Lighting That Defines Your Space.

DIFFERENT BEAM ANGLE DISPLAY

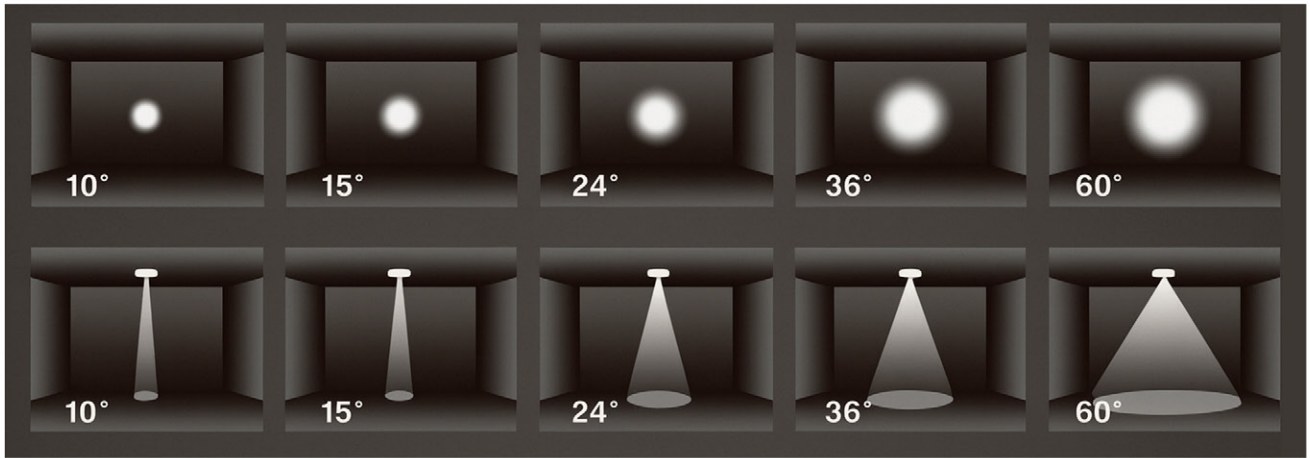

Every space tells a different story beam angles help shape it. Focused beams bring dramatic highlights to objects. Medium beams enhance room ambience with balanced lighting. Wide beams brighten large areas with smooth light distribution. Understanding beam angles helps you design smarter lighting layouts. Tirich LED Precision lighting for modern spaces.



COB LIGHTS

Precision-engineered COB lights designed for powerful, focused illumination. Superior brightness with minimal glare and maximum efficiency. Sleek designs that blend seamlessly into modern interiors. Reliable performance with long life and consistent light output. Perfect for homes, offices, retail, and architectural spaces.



PRO - 116

LED: CREE

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable

LUMENS OUTPUT: 130-140 LM/W

LENS: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24° / 36° / 60°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

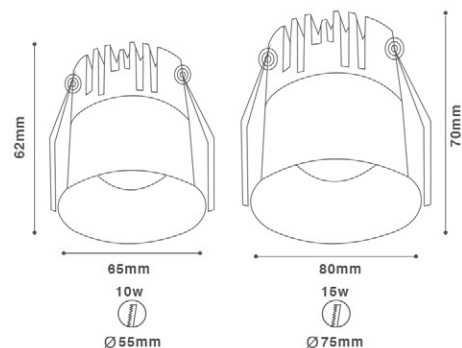

COLOR TEMPERATURE



Tunable



Dimmable



POWER

10w

15w

BODY COLOUR

White / Black

White / Black

DIMENSION

62*65mm

80*70mm

CUTOUT

55mm

72mm



PRO - 125

LED: **bridgelux** / **CREE**

DRIVER: Bag

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunable

LUMENS OUTPUT: 130-140 LM/W

LENS: Shinland / Darkoo


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36° / 24° / 15°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

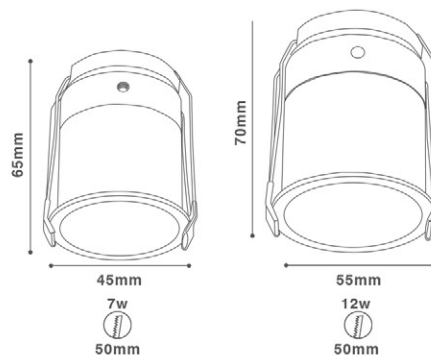

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

7w

12w

BODY COLOUR

White / Gun Black

White / Gun Black

DIMENSION

45*65mm

55*70mm

CUTOUT

40mm

50mm



PRO - 120

LED: CREE

DRIVER: Philips | Fulham | Osram | Bag

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable

LUMENS OUTPUT: 130-140 LM/W

LENS: GR optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24° / 36°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

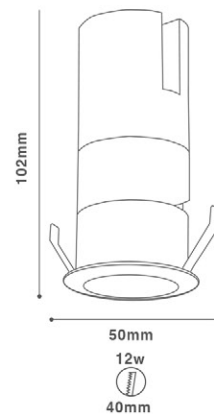

COLOR TEMPERATURE



POWER

12w

BODY COLOUR

White / Black

DIMENSION

50*102mm

CUTOUT

40mm



PRO - 126

LED: CREE

DRIVER: Philips | Fulham | Osram | Bag

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable

LUMENS OUTPUT: 130-140 LM/W

LENS: Herculux


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24° / 36° / 50°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

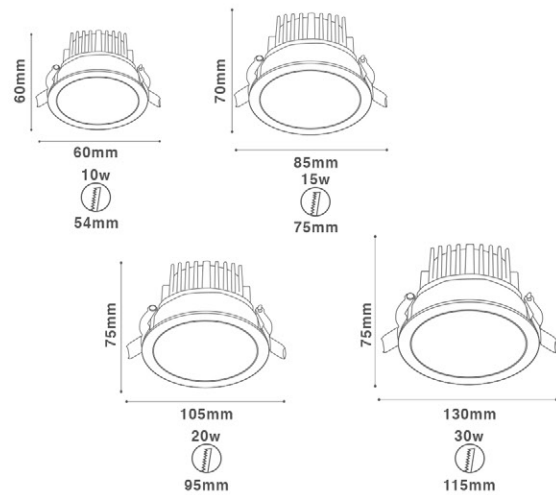

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

10w

15w

20w

30w

BODY COLOUR

White / Black

White / Black

White / Black

White / Black

REFLECTOR COLOUR

White / Black

White / Black

White / Black

White / Black

DIMENSION

60*60mm

85*65mm

105*75mm

130*75mm

CUTOUT

54mm

75mm

95mm

115mm



TLC - 109

LED: CREE

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

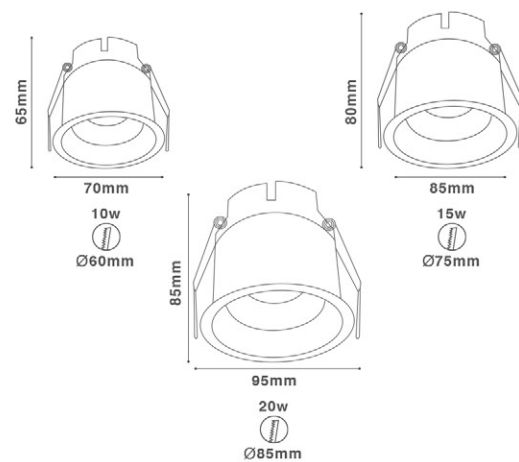

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

10w

15w

20w

BODY COLOUR

White / Black

White / Black

White / Black

DIMENSION (Outer X Height)

70*65mm

85*80mm

95*85mm

CUTOUT

60mm

75mm

85mm



Reflector Options



TLC - 111

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: GR optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 80°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

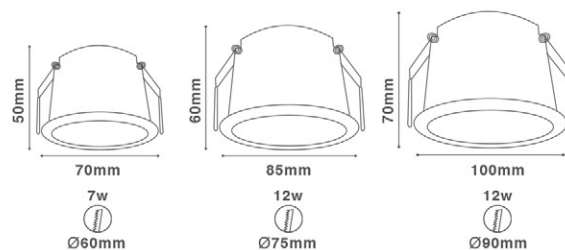

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

7w

12w

18w

BODY COLOUR

White / Black

White / Black

White / Black

REFLECTOR COLOUR

Black, Rose gold

Black, Rose gold

Black, Rose gold

DIMENSION (Outer X Height)

70*50mm

85*60mm

100*70mm

CUTOUT

60mm

75mm

90mm



PRO - 115

LED: **bridgelux** / **CREE** 

DRIVER: Philips | Fulham

CCT: 3000K | 4000K | 5000K | 6000K

LUMENS OUTPUT: 130-140 LM/W

LENS: Herculux


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

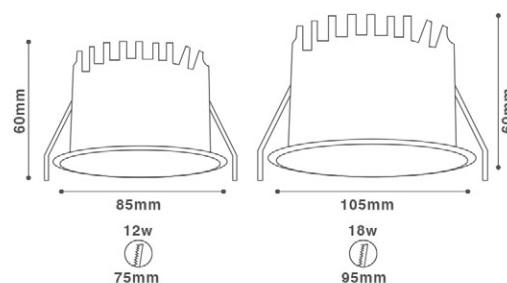

COLOR TEMPERATURE

3K 4K 5K 6K

POWER

12w

18w

BODY COLOUR

White / Black

White / Black

REFLECTOR COLOUR

Black

Black

DIMENSION

85*60mm

105*60mm

CUTOUT

75mm

95mm



PREMIUM ILLUMINATION,
WATERPROOF CONFIDENCE.



Reflector Options



TLC - 107

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram | Tirich

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable

LUMENS OUTPUT: 120-135 LM/W

REFLECTOR: Chuangxin


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

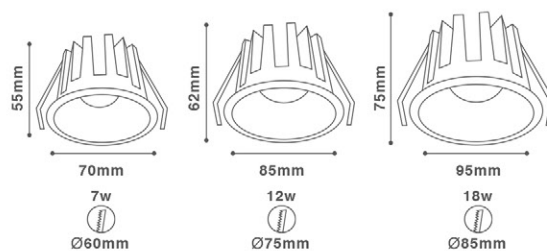

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

7w

12w

18w

BODY COLOUR

White / Black

White / Black

White / Black

REFLECTOR COLOUR

White, Black, Rose gold

White, Black, Rose gold

White, Black, Rose gold

DIMENSION (Outer X Height)

70*55mm

85*62mm

95*75mm

CUTOUT

60mm

75mm

85mm



TLC - 118

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunable

LUMENS OUTPUT: 130-140 LM/W

LENS: Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38° / 50°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

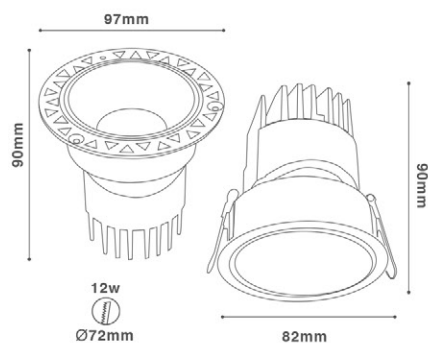

COLOR TEMPERATURE

3K 4K



Tunable

5K 6K



Dimmable



POWER	BODY COLOUR	DIMENSION	CUTOUT
7w	White / Black	60*70mm	50mm
7w(Trimless)	White / Black	75*70mm	50mm
12w	White / Black	82*90mm	72mm
12w(Trimless)	White / Black	97*90mm	72mm



TLC - 105

LED:  **bridge**lux

DRIVER: Philips

CCT: 3000K | 4000K

LUMENS OUTPUT: 120-130 LM/W

REFLECTOR: Chuangxin


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

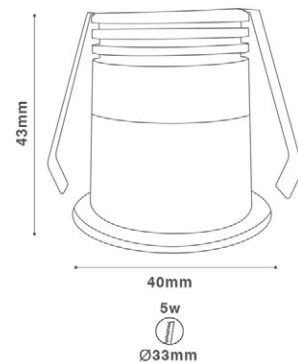

COLOR TEMPERATURE

3K 4K

POWER

5w

BODY COLOUR

White / Black

DIMENSION (Outer X Height)

40*43mm

CUTOUT

33mm



TLC - 159

LED:  **bridge**lux

DRIVER: Tirich

CCT: 3000K | 4000K

LUMENS OUTPUT: 110-120 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90



COLOR TEMPERATURE

3K 4K

POWER

3w

BODY COLOUR

White / Black / Rose Gold

DIMENSION (Outer X Height)

37*29mm

CUTOUT

30mm



TLC - 102

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram | Tirich

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable

LUMENS OUTPUT: 120-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 15° / 24° / 36° / 60°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

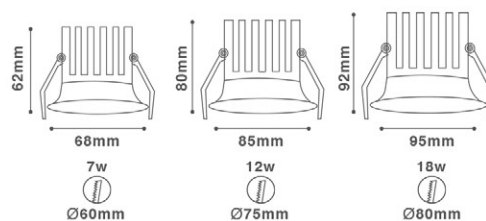

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

7w

12w

18w

BODY COLOUR

White / Black

White / Black

White / Black

DIMENSION (Outer X Height)

70*58mm

85*65mm

98*80mm

CUTOUT

64mm

75mm

85mm



TLC - 103

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24° / 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

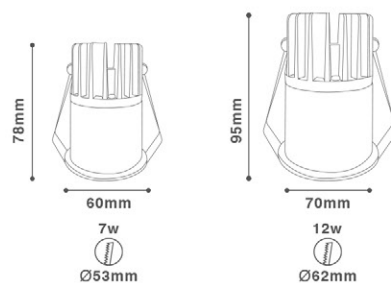

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

7w

12w

BODY COLOUR

White / Black

White / Black

DIMENSION (Outer X Height)

60*78mm

70*95mm

CUTOUT

53mm

62mm



MODERN ARCHITECTURAL LIGHTING

Tirich LED's TLC-113 recessed downlight is specially designed for contemporary interiors. With minimal ceiling aesthetics and powerful illumination, this luminaire is an ideal lighting solution for bathrooms, living spaces, corridors, and commercial areas.



TLC - 113

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunable

LUMENS OUTPUT: 130-140 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24° / 36° / 60°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

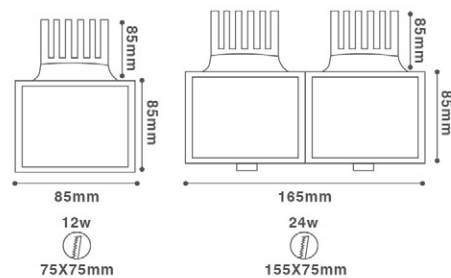

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

12w

24w

BODY COLOUR

White / Black

White / Black

DIMENSION (Outer X Height)

83*83mm

162*83mm

CUTOUT

75mm

155X77mm



TLC - 112

LED: CREE

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | Tunnable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

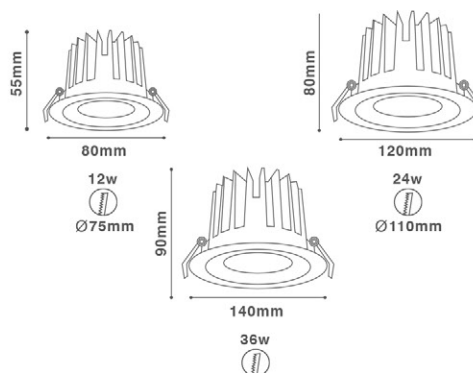

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

12w

24w

36w

BODY COLOUR

White

White

White

DIMENSION (Outer X Height)

80*55mm

120*80mm

140*90mm

CUTOUT

75mm

110mm

130mm



TLC - 335

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram | Tirich

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable

LUMENS OUTPUT: 120-140 LM/W

REFLECTOR: Chuangxin


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38° / 50°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

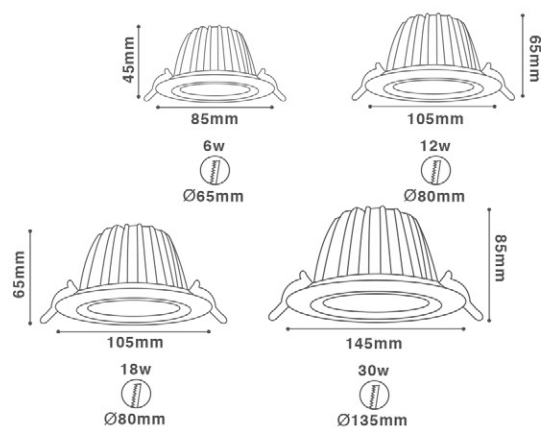

COLOR TEMPERATURE

3K 4K



Tunable

5K 6K



Dimmable



POWER	BODY COLOUR	DIMENSION	CUTOUT
6w	White / Black	85*45mm	65mm
12w	White / Black	105*65mm	80mm
18w	White / Black	105*65mm	80mm
30w	White / Black	145*85mm	135mm



TLC - 119

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38° / 50°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

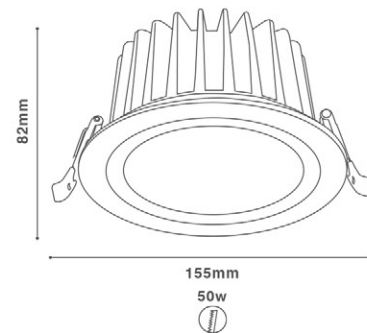

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

50w

BODY COLOUR

White

DIMENSION

155*82mm

CUTOUT

145mm



FOCUSED LIGHT. MODERN STYLE.





TLC - 114

LED: CREE

DRIVER: Philips

CCT: 3000K | 4000K | 5000K | 6000K | Tunnable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24° / 36° / 50°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

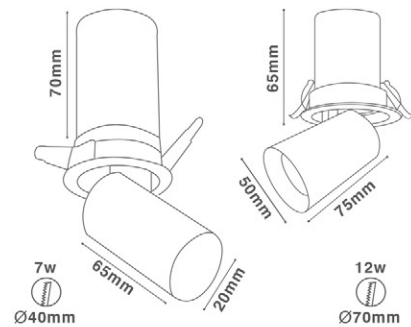

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

7w

12w

BODY COLOUR

White / Black

White / Black

DIMENSION (Outer X Height)

20*65*70mm

85*100mm

CUTOUT

40mm

70mm



PRO +142

LED: **CREE**

DRIVER: Osram

CCT: 3000K | 4000K | 5000K | 6000K | Dimmable|

Tunable | Tunable (Application)

LUMENS OUTPUT: 130-140 LM/W

LENS: Darkoo


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80/90/95

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

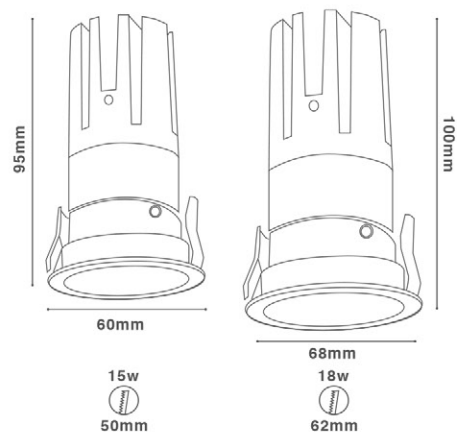

COLOR TEMPERATURE



Tunable



Dimmable



POWER	BODY COLOUR	DIMENSION	CUTOUT
15w	White / Black	60*100mm	50mm
18w	White / Black	68*95mm	62mm



PRO +141

LED:  **bridge**lux

DRIVER: Philips | Fulham | Os

CCT: 3000K | 4000K | 5000K | 6000K | Dimmable |
Tunable

LUMENS OUTPUT: 150-160 LM/W

REFLECTOR: Shinland

MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24°/38°

CRI: 80/90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

COLOR TEMPERATURE


3K 4K 5K 6K



Tunable



Dimmable

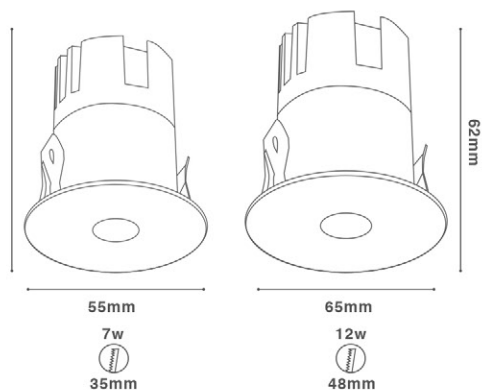

POWER	BODY COLOUR	DIMENSION	CUTOUT
7w	White / Black	42°55mm	35mm
12w	White / Black	62°65mm	48mm





TLC - 004

LED: **OSRAM**

DRIVER: Tirich | Philips

CCT: 3000K | 4000K

LUMENS OUTPUT: 150-160 LM/W

LENS: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 5°

CRI: 80/90

INPUT VOLTAGE: 150-240 Vac 50 HZ

POWER FACTOR: >0.90

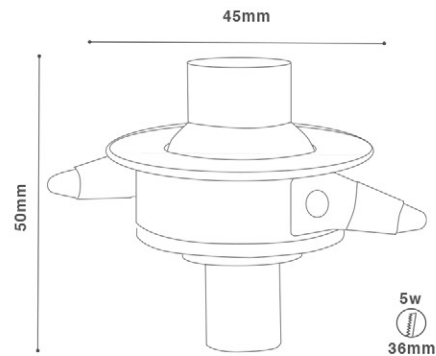

COLOR TEMPERATURE

3K 4K

POWER

5w

BODY COLOUR

White / Black

DIMENSION (Outer X Height)

45*50mm

CUTOUT

36mm



PRO +130

LED: CREE

DRIVER: Osram

CCT: 3000K | 4000K | 5000K | 6000K | Tunable

LUMENS OUTPUT: 140-150 LM/W

LENS: GR optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 90

INPUT VOLTAGE: 220V-240V AC

POWER FACTOR: >0.95

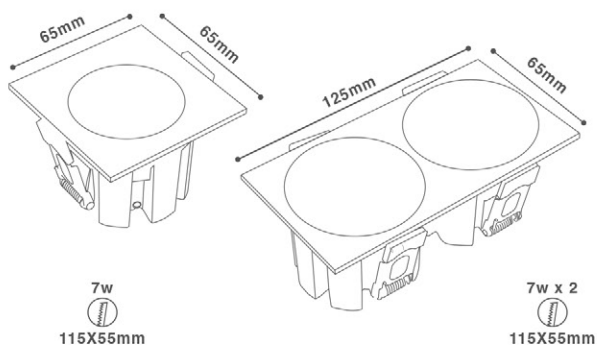

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

7w
7w x 2

BODY COLOUR

White / Black
White / Black

DIMENSION (Outer X Height)

65x65mm
125x65mm

CUTOUT

55mm
115x55mm



PRO +013

LED: CREE

DRIVER: Osram

CCT: 3000K | 4000K | 5000K | 6000K | Tunnable

LUMENS OUTPUT: 140-150 LM/W

LENS: GR optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 90

INPUT VOLTAGE: 220V-240V AC

POWER FACTOR: >0.95

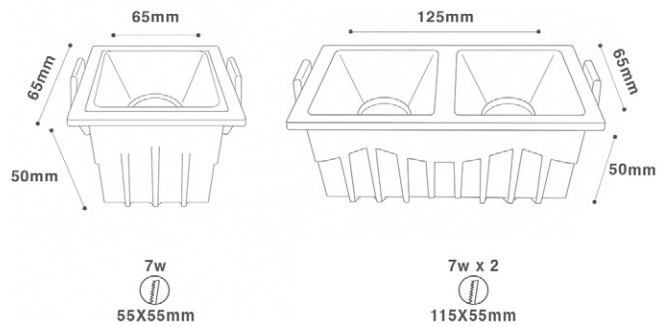

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

7w
7w x 2

BODY COLOUR

White / Black
White / Black

DIMENSION (Outer X Height)

65x65x50mm
125x65x50mm

CUTOUT

55x55mm
115x55mm



PRO +133

LED: Citizen

DRIVER: Osram

CCT: 3000K | 4000K | 5000K | 6000K | Dimmable | Tunnable

LUMENS OUTPUT: 150-160 LM/W

LENS: GR optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36° | 45° | 60°

CRI: 90 / 97

INPUT VOLTAGE: 220V-240 V

POWER FACTOR: >0.95

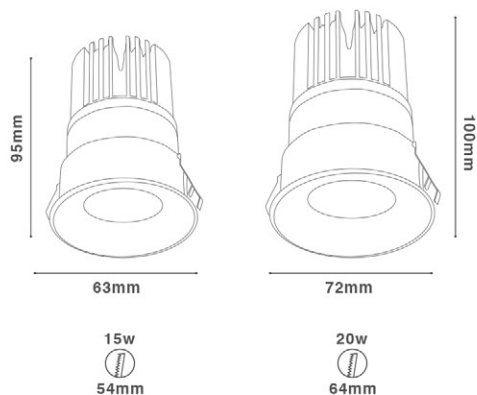

COLOR TEMPERATURE



Tunable



Dimmable



POWER

15w

20w

BODY COLOUR

White / Black

White / Black

DIMENSION (Outer X Height)

63*95mm

72*100mm

CUTOUT

54mm

64mm



PRO +131

LED: Citizen

DRIVER: Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 in 1 |

Dimmable | Tunnable

LUMENS OUTPUT: 130-140 LM/W

LENS: GR optics

MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 90 / 97

INPUT VOLTAGE: 220V-240V Ac

POWER FACTOR: >0.95

COLOR TEMPERATURE


3K 4K 5K 6K



Tunable



Dimmable

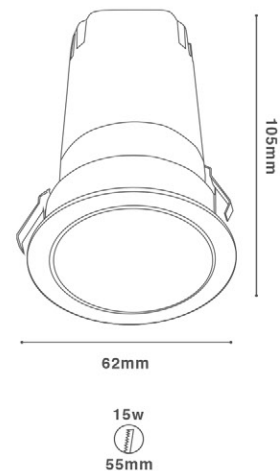

POWER

15w

BODY COLOUR

White / Black

DIMENSION (Outer X Height)

62 x 105mm

CUTOUT

55mm



PRO +132

LED: Citizen

DRIVER: Osram

CCT: 3000K | 4000K | 5000K | 6000K |

Dimmable | Tunnable

LUMENS OUTPUT: 150-160 LM/W

LENS: GR optics

MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 90 / 97

INPUT VOLTAGE: 220V-240V AC

POWER FACTOR: >0.95

COLOR TEMPERATURE

3K 4K


5K 6K



Tunable



Dimmable

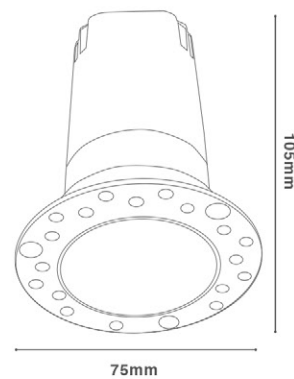

75mm

15w
53mm

POWER

15w

BODY COLOUR

White / Black

DIMENSION
(Outer X Height)

75 x 105mm

CUTOUT

53mm



PRO 127

LED: bridge**lux**

DRIVER: Bag

CCT: 3000K | 4000K | 5000K | 6000K | Tunnable

LUMENS OUTPUT: 140-150 LM/W

LENS: GR optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24° / 36°

CRI: 80 / 90

INPUT VOLTAGE: 220V-240

POWER FACTOR: >0.95

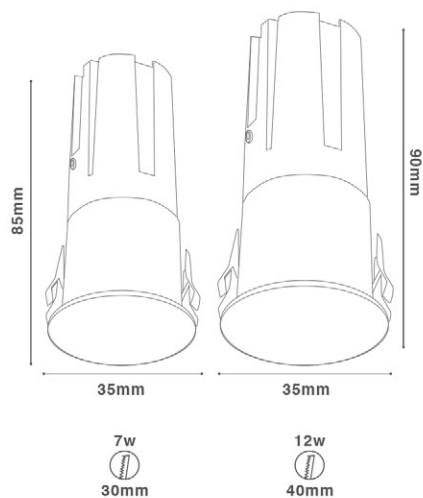

COLOR TEMPERATURE

3K

4K

5K

6K



Tunable



POWER

7w

12w

BODY COLOUR

White / Gun Black

White / Gun Black

DIMENSION (Outer X Height)

35x85mm

45x90mm

CUTOUT

30mm

40mm

A modern gallery interior featuring a large abstract painting on a white wall, illuminated by a white adjustable track light. To the left, a hallway with a marble wall is lit by a vertical LED strip. A bronze sculpture sits on a pedestal in the foreground.

ADJUSTABLE TWIN LED SURFACE MODULE



PRO 140

LED: **bridgelux**

DRIVER: Tirich | Philips

CCT: 3000K | 4000K | 5000K | 6000K

LUMENS OUTPUT: 130-140 LM/W

LENS: Optics

MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24° / 36°

CRI: 80/90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

COLOR TEMPERATURE


3K 4K 5K 6K



Tunable



Dimmable

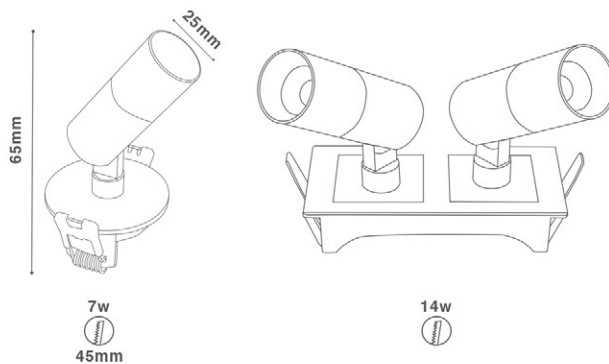

POWER	BODY COLOUR	DIMENSION (Outer X Height)	CUTOUT
7w	White / Black	25*65mm	45mm
7w x 2	White / Black	104*50mm	92X40mm



TLC - 108

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38° / 24°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

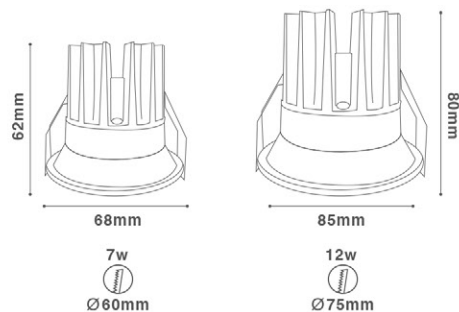

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

7w

12w

BODY COLOUR

White / Black

White / Black

DIMENSION (Width X Height)

68*62mm

85*80mm

CUTOUT

60mm

75mm



TLC - 129

LED:  bridgeLux

DRIVER: Tirich | Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 |

Dimmable | Tunnable

LUMENS OUTPUT: 130-140 LM/W

LENS: GR optics

MATERIAL: Aluminium Die Casting

BEAM ANGLE: 15° / 24° / 36° / 50°

CRI: 80/90

INPUT VOLTAGE: 220V-240

POWER FACTOR: >0.95

COLOR TEMPERATURE


3K 4K 5K 6K



Tunable



Dimmable

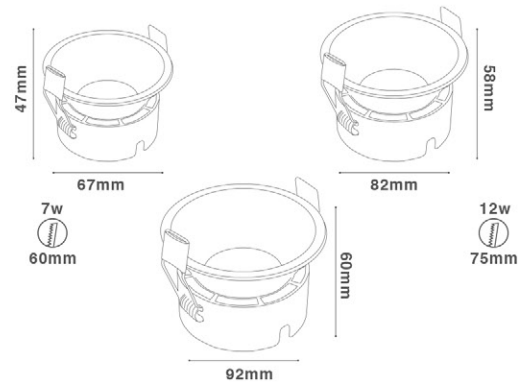

POWER	BODY COLOUR	DIMENSION (Outer X Height)	CUTOUT
7w	White / Black	67x47mm	60mm
12w	White / Black	82x58mm	75mm
18w	White / Black	92x60mm	85mm



PRO - 128

LED: **bridgelux**

DRIVER: Importend HPF

CCT: 4000K

LUMENS OUTPUT: 120 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 80

INPUT VOLTAGE: 220-240V AC

POWER FACTOR: >0.95

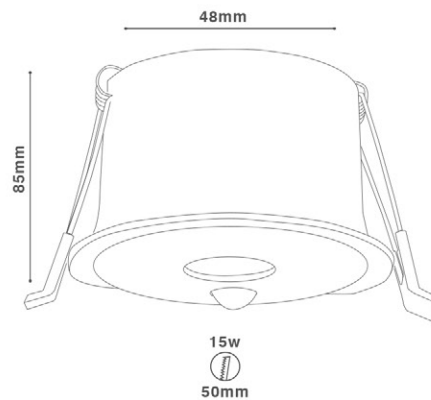

COLOR TEMPERATURE

4K

POWER

10w

BODY COLOUR

White

DIMENSION
(Outer X Height)

85 x 48 mm

CUTOUT

75mm



TLC - 101(Flavacob)

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 |

Tunable

LUMENS OUTPUT: 120-140 LM/W

REFLECTOR: Shinland

MATERIAL: Aluminium Die Casting

BEAM ANGLE: 15° / 24° / 36° / 60°

CRI: 80/90

INPUT VOLTAGE: 220V-240V Ac

POWER FACTOR: >0.95

COLOR TEMPERATURE


3K 4K 5K 6K



Tunable



Dimmable

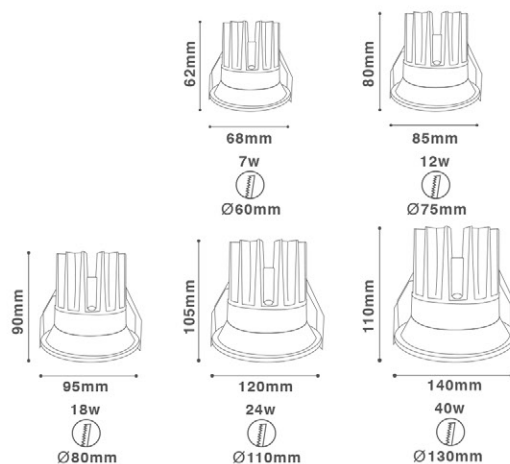

POWER	BODY COLOUR	DIMENSION (Outer X Height)	CUTOUT
7w	White / Black	68*62mm	60mm
12w	White / Black	85*80mm	75mm
18w	White / Black	95*90mm	85mm
24w	White / Black	120*105mm	110mm
40w	White / Black	140*110mm	130mm



TLC - 106

LED: **CREE** / **bridgelux**

DRIVER: Bag

CCT: 3000K | 4000K | 5000K | 6000K

LUMENS OUTPUT: 140-160 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

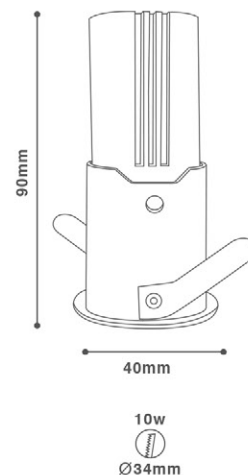

COLOR TEMPERATURE



Tunable



Dimmable



POWER

10w

BODY COLOUR

White / Black

DIMENSION (Outer X Height)

40*90mm

CUTOUT

34mm



PRO - 117

LED: **OSRAM**

DRIVER: Tirich

CCT: 3000K | 4000K

LUMENS OUTPUT: 140-150 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 10°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

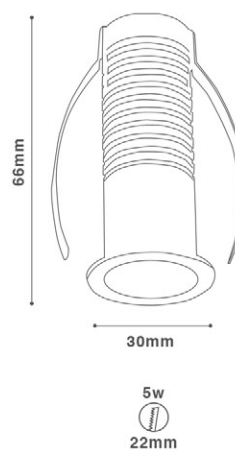

COLOR TEMPERATURE

3K 4K

POWER

5w

BODY COLOUR

White / Black

DIMENSION

30*66mm

CUTOUT

22mm



TLC - 144

LED: CREE

DRIVER: Impotent

CCT: 3000k | 4000k | 5000k | 6000k | 3 in 1, Tunnable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

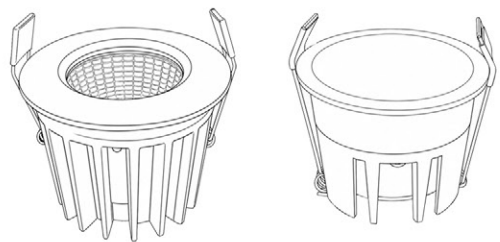

COLOR TEMPERATURE

3K 4K 5K 6K

POWER

7w
12w
18w
24w

BODY COLOUR

White / Black
White / Black
White / Black
White / Black

DIMENSION (Outer X Height)



TLC - 135

LED:

DRIVER: Philips

CCT: 3000k | 4000k | 5000k | 6000k | 3 IN 1 Tunnable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 91

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.91



COLOR TEMPERATURE

3K 4K 5K 6K

POWER

7w

12w

18w

BODY COLOUR

White / Black

White / Black

White / Black



TLC - 143

LED: bridge**lux**

DRIVER: Impotant

CCT: 3000k | 4000k | 5000k | 6000k | 3 in 1 Tunnable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.92



COLOR TEMPERATURE

3K 4K 5K 6K

POWER

12w

BODY COLOUR

White / Black / Wooden



TLC - 145

LED: **bridgelux**

DRIVER: Impotent

CCT: 3000k | 4000k | 5000k | 6000k | 3 IN 1 Tunnable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90



COLOR TEMPERATURE

3K 4K 5K 6K

POWER

7w

12w

BODY COLOUR

White / Black

White / Black



DOWN LIGHTS

With energy-efficient performance and glare-free lighting, Tirich LED Down Lights create a comfortable and well-lit environment for living rooms, kitchens, offices, and retail spaces.



TLC - 338

LED: bridge**lux**

DRIVER: Tirich

CCT: 3000K | 4000K | 6000K

LUMENS OUTPUT: 130-140 LM/W

DIFFUSER: Yongtek




MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90



COLOR TEMPERATURE

3K 4K 6K

POWER

16w
24w
32w

BODY COLOUR

White
White
White

DIMENSION

120*30mm
170*30mm
225*30mm


CUTOUT

105mm
155mm
205mm



TLC - 311

LED: ~~bridgelux~~ / **OSRAM**
DRIVER: Philips | Fulham | Osram | Tirich
CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable
LUMENS OUTPUT: 120-130 LM/W
DIFFUSER: Yongtek
MATERIAL: Aluminium Die Casting
BEAM ANGLE: 110°
CRI: 80 / 90
INPUT VOLTAGE: 150-240 Vac 50 Hz
POWER FACTOR: >0.90

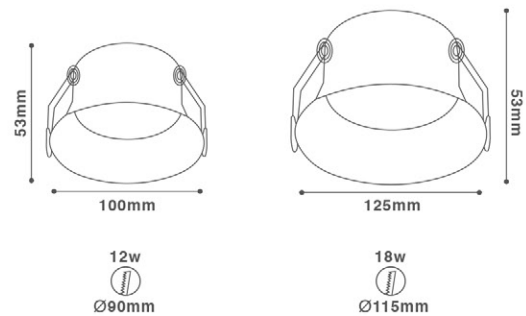

COLOR TEMPERATURE



POWER

12w
18w

BODY COLOUR

White / Black
White / Black

DIMENSION (Outer X Height)

100*53mm
125*53mm

CUTOUT

90mm
115mm



TLC - 334

LED: **bridgelux** / **OSRAM**

DRIVER: Philips | Tirich

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable

LUMENS OUTPUT: 120-130 LM/W

DIFFUSER: Yongtek



MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90



COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

12w

18w

BODY COLOUR

White / Black

White / Black

SHAPE

Round

Round

DIMENSION (Width X Height)

110*30mm

155*30mm

CUTOUT

100mm

145mm



TLC - 333

LED: **bridgelux** / **OSRAM**

DRIVER: Philips | Fulham | Osram | Tirich

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunable

DIFFUSER: Yongtek


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

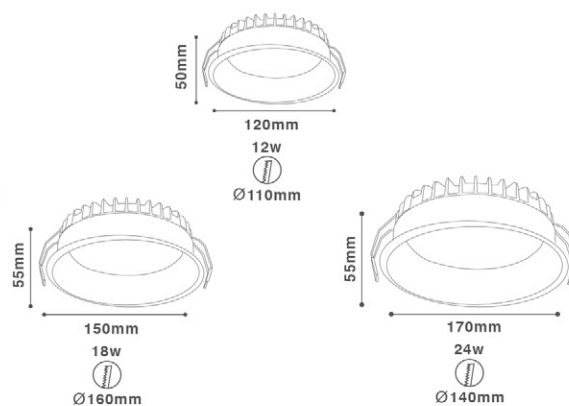

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

12w

18w

24w

BODY COLOUR

White / Black

White / Black

White / Black

DIMENSION

120*50mm

150*55mm

170*55mm

CUTOUT

110mm

140mm

160mm



PRO - 340

LED: **bridgelux** / **OSRAM**

DRIVER: Philips | Tirich | Bag

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 Tunnable

LUMENS OUTPUT: 120-135 LM/W

DIFFUSER: Yongtek


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

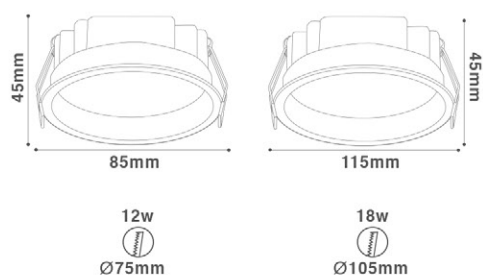

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER	BODY COLOUR	DIMENSION (Outer X Height)	CUTOUT
12w	White / Black	85*45mm	75mm
18w	White / Black	115*45mm	105mm



SMART LIGHTING, PREMIUM LIVING



PRO - 240

LED: CREE

DRIVER: Impotent

CCT: 3000k | 4000k | 5000k | 6000k | 3 in 1 Tunnable

LUMENS OUTPUT: 130-140 LM/W

DIFFUSER: Shinland

MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90



COLOR TEMPERATURE

3K 4K 5K 6K

POWER

7W

12w

18w

BODY COLOUR

White / Black

White / Black

White / Black



TLC - 204

LED: **bridgelux**

DRIVER: Fulham

CCT: 3000k | 4000k | 5000k | 6000k

LUMENS OUTPUT: 130-140 LM/W

LENS: Shinland | GR Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.96



COLOR TEMPERATURE

3K 4K 5K 6K

POWER

7w

12w

18w

30w

BODY COLOUR

White / Black

White / Black

White / Black

White / Black

REFLECTER COLOUR

Black ,Rose Gold

Black ,Rose Gold

Black ,Rose Gold

Black ,Rose Gold



TLC - 344

LED:

DRIVER: Impotent

CCT: 3000k | 4000k | 5000k | 6000k

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38*

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.98



COLOR TEMPERATURE

3K 4K 5K 6K

POWER

12w

18w

BODY COLOUR

White / Black

White / Black



TLC - 339

LED: **bridgelux**

DRIVER: Fulham

CCT: 4000k | 6000k

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.93



COLOR TEMPERATURE

3K 4K 5K 6K


POWER BODY COLOUR

40w White



LAZER LIGHTS

Precision-engineered for focused illumination Sharp light output with minimal glare Designed for modern architectural ceilings Elegant black finish with superior performance Lighting that defines spaces with clarity.

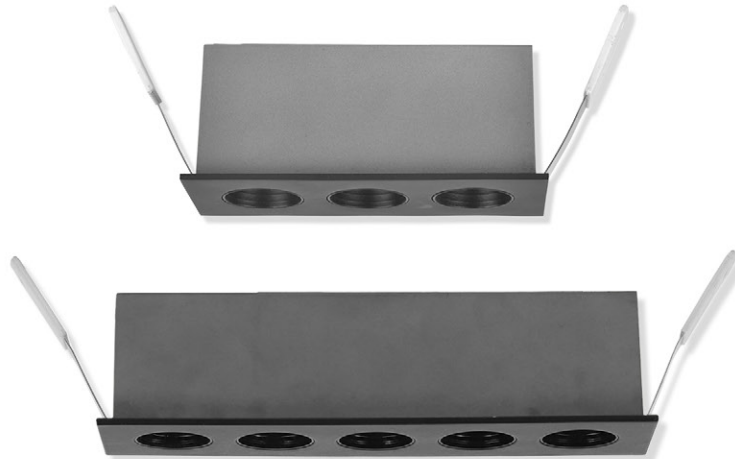

PRO - 154

LED: **bridgelux** / **OSRAM**

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | 3 IN 1 | Tunnable

LUMENS OUTPUT: 130-140 LM/W

LENS: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

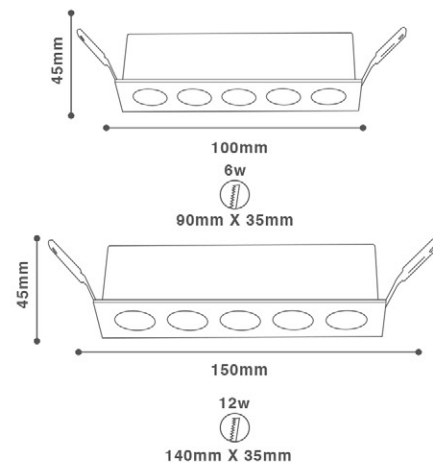

COLOR TEMPERATURE

3K 4K



Tunable

5K 6K



Dimmable



POWER

6w

12w

BODY COLOUR

White / Black

White / Black

DIMENSION

102*40mm

160*40mm

CUTOUT

95*32mm

152*32mm



TLC - 153

LED:  bridgeLux

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz


POWER FACTOR: >0.90



66mm

6w

Ø 30mm



135mm

12w

Ø 30mm

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

6w

12w

BODY COLOUR

White / Black

White / Black

REFLECTOR COLOUR

Black, Rose gold

Black, Rose gold

DIMENSION

66*35mm

135*35mm

CUTOUT

30mm

30mm



TLC - 152 (MAGIK)

LED:  bridgeLux

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K | Tunnable

LUMENS OUTPUT: 130-140 LM/W

LENS: GR Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

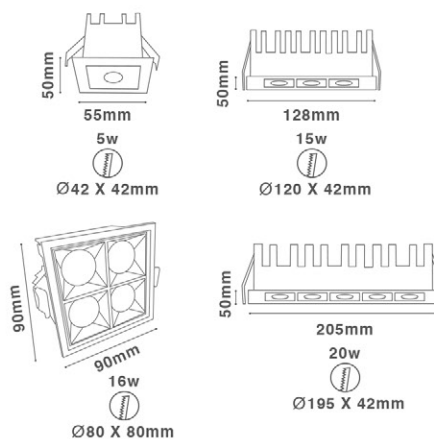

COLOR TEMPERATURE

3K 4K



Tunable

5K 6K



Dimmable



POWER

5w

15w

16w

20w

BODY COLOUR

White / Black

White / Black

White / Black

White / Black

DIMENSION

55*50mm

128*50mm

90*90mm

205*50mm

CUTOUT

42*42mm

120*42mm

80*80mm

195*42mm



TLC - 151 (LINEA LAZER)

LED:  bridgeLux

DRIVER: Philips | Fulham | Osram

CCT: 3000K | 4000K | 5000K | 6000K |
3 IN 1 | Tunnable

LUMENS OUTPUT: 120-130 LM/W

REFLECTOR: Shinland






MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

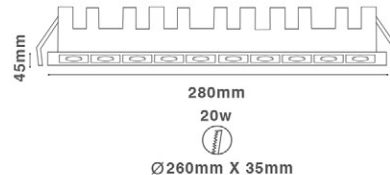

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

3w

4w

6w

12w

20w

BODY COLOUR

White / Black

White / Black

White / Black

White / Black

White / Black

REFLECTOR COLOUR

Black, Rose gold

Black, Rose gold

Black, Rose gold

Black, Rose gold

Black, Rose gold

DIMENSION

45*45mm

75*45mm

95*40mm

145*45mm

280*45mm

CUTOUT

35*35mm

65*35mm

85*30mm

135*35mm

260*35mm



PRO - 014

LED: **OSRAM**

DRIVER: Importend HPF

CCT: 3000K | 4000K

LUMENS OUTPUT: 130 LM/W

LENS: GR optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24*

CRI: 80

INPUT VOLTAGE: 220V-240V AC

POWER FACTOR: >0.95

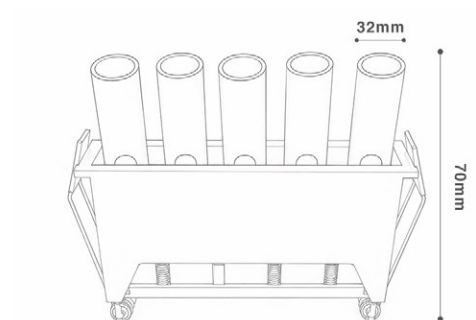

COLOR TEMPERATURE

3K 4K

POWER

6w

10w

BODY COLOUR

White / Black

White / Black

DIMENSION (Outer X Height)

70 x 32mm

110 x 32mm

CUTOUT

65 x 25mm

105 x 25mm



PRO - 054

LED: **bridgelux**

DRIVER: Fulham

CCT: 3000K | 4000K | 5000K | 6000K | 3 in 1 | Tunable

LUMENS OUTPUT: 130 LM/W

LENS: GR optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 80 / 90

INPUT VOLTAGE: 220V-240V Ac

POWER FACTOR: >0.95

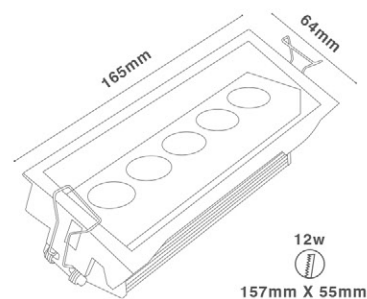

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable



POWER

12w

BODY COLOUR

White / Black

DIMENSION
(Outer X Height)

165 x 64mm

CUTOUT

157 x 55mm




TRACK MOUNTED LED SPOTLIGHT

High-efficiency LED track light delivering focused illumination with adjustable angle, durable body, excellent heat dissipation, and clean beam performance for retail, galleries, showrooms, and modern interiors.



TLC - 124

LED: bridge**lux** / **CREE** 
DRIVER: Philips | Fulham | Osram
CCT: 3000K | 4000K | 5000K | 6000K
LUMENS OUTPUT: 130-140 LM/W
REFLECTOR: Darkoo
MATERIAL: Aluminium Die Casting
BEAM ANGLE: 38°
CRI: 80 / 90
INPUT VOLTAGE: 150-240 Vac 50 Hz
POWER FACTOR: >0.90

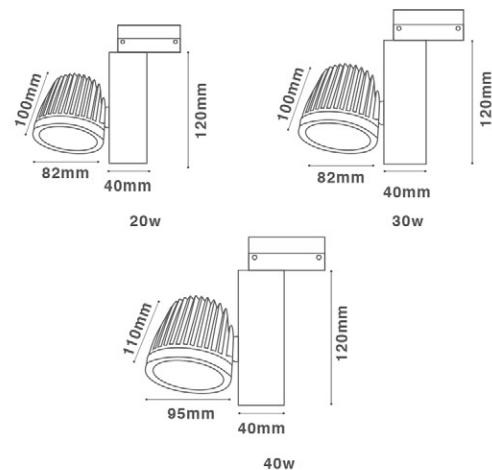

COLOR TEMPERATURE

3K 4K 5K 6K

POWER	BODY COLOUR	DIMENSION
20w	White / Black	82*100mm
30w	White / Black	82*100mm
40w	White / Black	95*110mm



TLC - 123

LED:  **bridgelux**

DRIVER: Imported HPF

CCT: 3 IN 1 BEAM ANGLE CHANGE

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 15° / 36° / 60°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

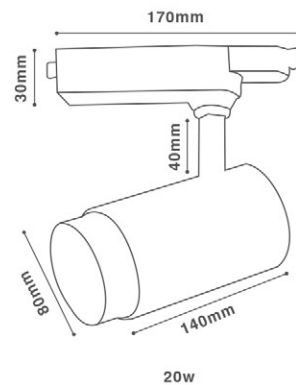

COLOR TEMPERATURE

3K 4K 6K

POWER

20w

BODY COLOUR

Black

DIMENSION

80*140mm



TLC - 121

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram | Tirich

CCT: 3000K | 4000K | 5000K | 6000K | Tunnable

LUMENS OUTPUT: 120-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

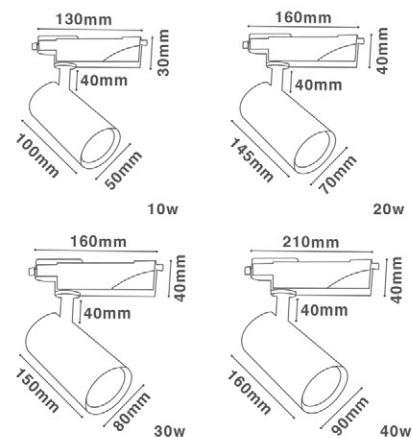

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable



Dimmable

POWER	BODY COLOUR	DIMENSION (Outer X Height)
10w	White / Black	50*110mm
20w	White / Black	70*145mm
30w	White / Black	80*150mm
40w	White / Black	90*160mm



DESIGNED TO HIGHLIGHT

Precision Lighting for Modern Spaces





LUXURY SURFACE LIGHT

a premium outdoor lighting solution designed to enhance architectural spaces with precision and elegance. Crafted with a robust matte-black metal body and advanced optical lens, it delivers focused, glare-controlled illumination for façades, landscapes, and outdoor features.



PRO - 210 (FRAME HIGHLIGHTER)

LED: **CREE** 

DRIVER: Tirich

CCT: 3000K

LUMENS OUTPUT: 130-140 LM/W

LENS: Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

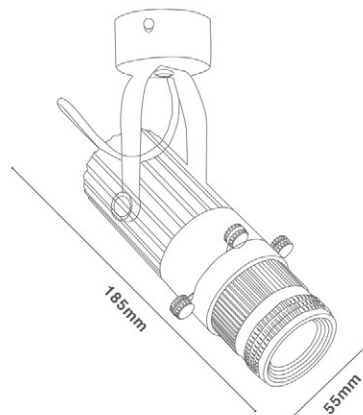

COLOR TEMPERATURE

3K

POWER

12w

BODY COLOUR

Black

DIMENSION

55*185mm


SHAPE HIGHLIGHT





TLC - 208

LED: CREE / bridgelux
DRIVER: Philips | Fulham | Osram | Tirich
CCT: 3000k | 4000k | 5000k | 6000k | 3 IN 1
LUMENS OUTPUT: 120-130 LM/W
LENS: Shinland
MATERIAL: Aluminium Die Casting
BEAM ANGLE: 38°
CRI: 80 / 90
INPUT VOLTAGE: 150-240 Vac 50 Hz
POWER FACTOR: >0.90

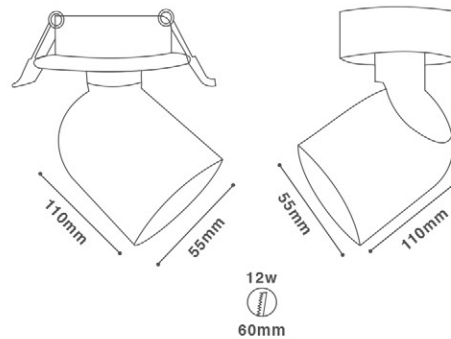

COLOR TEMPERATURE

3K 4K 5K 6K

POWER

12w

BODY COLOUR

White/Black

REFLECTOR COLOUR

Black

DIMENSION

(Outer X Height)

80*140mm



PRO - 209

LED: CREE

DRIVER: Tirich

CCT: 3000k | 4000k | 5000k | 6000k | 3 IN 1

LUMENS OUTPUT: 130-140 LM/W

LENS: Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

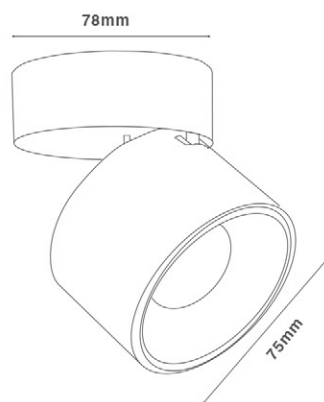

COLOR TEMPERATURE

3K 4K 5K 6K

POWER

12w

BODY COLOUR

White/Black

DIMENSION

75*78mm



PRO - 207

LED: bridgelux / OSRAM

DRIVER: Fulham | Tirich

CCT: 3000k | 4000k | 5000k | 6000k

LUMENS OUTPUT: 130-140 LM/W

DEFFUSER: Yongtek


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

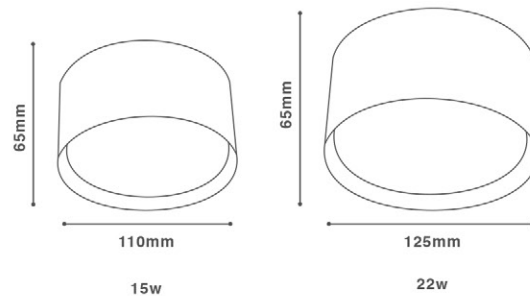

COLOR TEMPERATURE

3K 4K 5K 6K

POWER

15w

22w

BODY COLOUR

White/Black

White/Black

DIMENSION (Outer X Height)

110*65mm

125*65mm



TLC - 201

LED: bridge**lux**

DRIVER: Tirich

CCT: 3000k | 4000k | 5000k | 6000k | 3 in 1

LUMENS OUTPUT: 130-140 LM/W

DIFFUSER: Yongtek


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

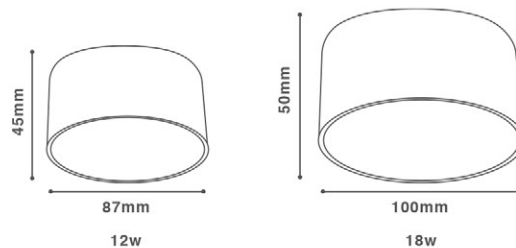

COLOR TEMPERATURE

3K 4K 5K 6K

POWER	BODY COLOUR	DIMENSION (Outer X Height)
12w	White / Black / Wooden	87*45mm
18w	White / Black / Wooden	100*50mm



TLC - 206

LED: **bridgelux** / **CREE** 

DRIVER: Philips | Fulham | Osram | Tirich

CCT: 3000k | 4000k | 5000k | 6000k | 3 IN 1

LUMENS OUTPUT: 130-140 LM/W

LENS: Shinland | GR Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

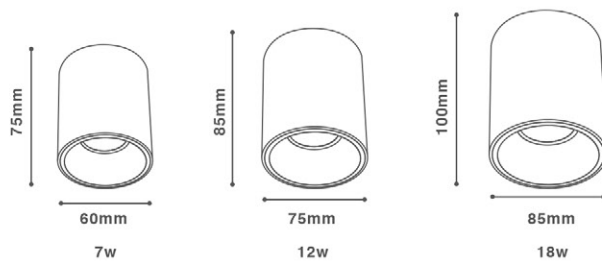

COLOR TEMPERATURE

3K 4K 5K 6K

POWER

7w

12w

18w

BODY COLOUR

White / Black

White / Black

White / Black

REFLECTER COLOUR

Black ,Rose Gold

Black ,Rose Gold

Black ,Rose Gold

DIMENSION

60*75mm

75*85mm

85*100mm



MINIMAL FORM, MAXIMUM IMPACT

The elegant wood-finish cylindrical body adds a premium, natural touch while blending seamlessly with contemporary architecture.



TLC - 205

LED: **bridgelux** / **CREE** 

DRIVER: Philips | Fulham | Osram | Tirich

CCT: 3000k | 4000k | 5000k | 6000k | 3 in 1

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: GR Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

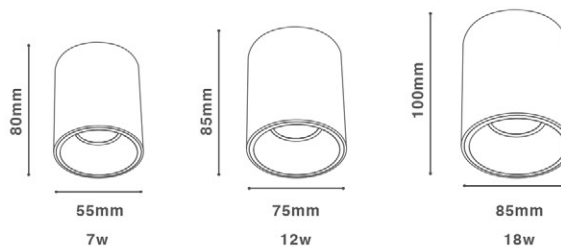

COLOR TEMPERATURE

3K 4K 5K 6K

POWER	BODY COLOUR	REFLECTOR COLOUR	DIMENSION
7w	Wooden	Black, Rose gold	55*80mm
12w	Wooden	Black, Rose gold	75*85mm
18w	Wooden	Black, Rose gold	85*100mm



TLC - 203

LED: **bridgelux** / **CREE**

DRIVER: Philips | Fulham | Osram | Tirich | 3 IN 1

CCT: 3000k | 4000k | 5000k | 6000k

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: GR Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

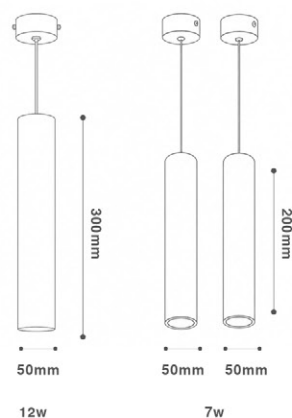

COLOR TEMPERATURE

3K 4K 5K 6K

POWER

7w

12w

BODY COLOUR

White / Black / Wooden

White / Black / Wooden

REFLECTOR COLOUR

Black, Rose Gold

Black, Rose Gold

DIMENSION (Outer X Height)

50*200mm

50*300mm



TLC - 155

LED: bridge**lux**

DRIVER: Tirich

CCT: 3000k | 4000k | 5000k | 3 IN 1

LUMENS OUTPUT: 130-140 LM/W

LENS: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

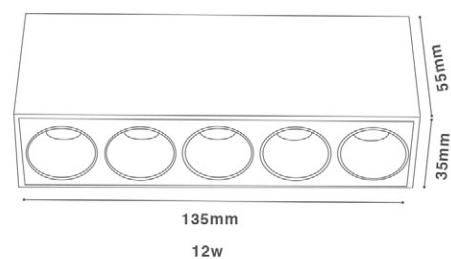

COLOR TEMPERATURE

3K 4K 5K 6K

POWER

12w

BODY COLOUR

White / Black

DIMENSION

135*35mm

HEIGHT

55mm



PRO-230

LED: **bridgelux**

DRIVER: Fulham

CCT: 3000K | 4000K | 5000K | 6000K

LUMENS OUTPUT: 130 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 24°, 38°

CRI: 80

INPUT VOLTAGE: 220V-240V AC

POWER FACTOR: >0.95

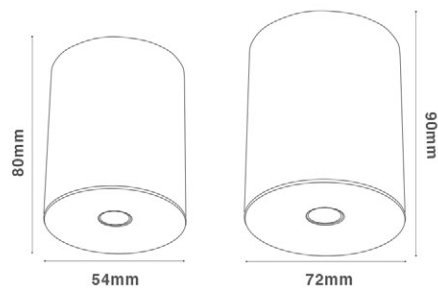

COLOR TEMPERATURE

3K 4K 5K 6K

POWER

7w

12w

BODY COLOUR

White / Black

White / Black

DIMENSION (Outer X Height)

54 x 80mm

72 x 90mm



SURFACE MOUNTED LED LIGHT



TLC - 444

LED: **bridgelux**

DRIVER: Importend

CCT: 3000K | 4000K | 5000K | 6000K

LUMENS OUTPUT: 120-130 LM/W

DIFFUSER: Yongtek


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80/90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

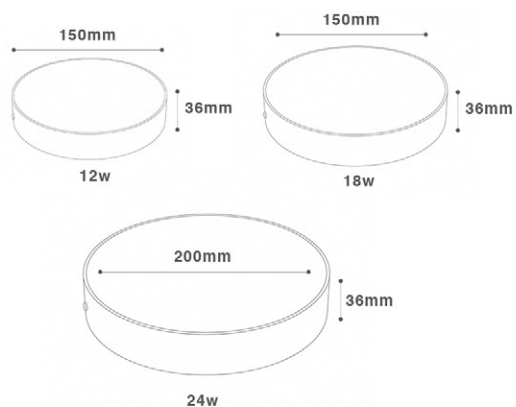

COLOR TEMPERATURE

3K 4K 5K 6K

POWER	BODY COLOUR	DIMENSION
12w	White / Black	100*36mm
18w	White / Black	150*36mm
24w	White / Black	200*36mm



PRO - 232

LED: CREE

DRIVER: Fulhum / Bag

CCT: 3000K | 4000K | 5000K | 6000K | Tunnable

LUMENS OUTPUT: 130-140 LM/W

REFLECTOR: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36° / 60°

CRI: 80/90

INPUT VOLTAGE: 150-240 Vac50 Hz

POWER FACTOR: >0.90

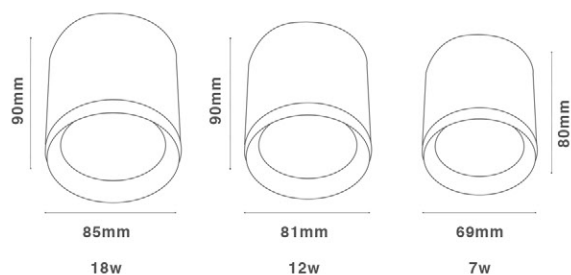

COLOR TEMPERATURE

3K 4K 5K 6K

POWER	BODY COLOUR	DIMENSION
7w	Gun Black	69 x 80mm
12w	Gun Black	81 x 90mm
18w	Gun Black	85 x 90mm



ELEGANT SQUARE SURFACE LIGHTS IN MODERN INTERIOR


Modern entryway featuring sleek surface-mounted square surface lights, delivering clean illumination, minimal aesthetic, and uniform brightness for contemporary homes and architectural interior spaces.



TLC - 052

LED:  **bridge**lux
DRIVER: Imported
CCT: 3000K | 4000K
LUMENS OUTPUT: 120 LM/W
REFLECTOR: Shinland
MATERIAL: Aluminium Die Casting
BEAM ANGLE: 24°
CRI: 80
INPUT VOLTAGE: 220V-240V Ac
POWER FACTOR: >0.95

COLOR TEMPERATURE
 3K 4K

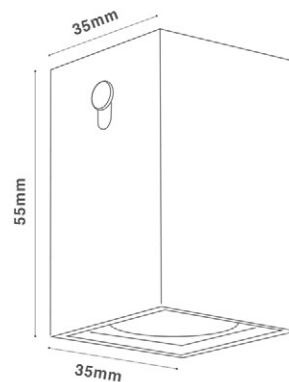

POWER	BODY COLOUR	DIMENSION (Outer X Height)
3w	White / Black	35 x 35 x 55mm



TLC - 226

LED: **bridgelux**

DRIVER: Importend

CCT: 3000K

LUMENS OUTPUT: 120 LM/W

REFLECTOR: -----


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 80/90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

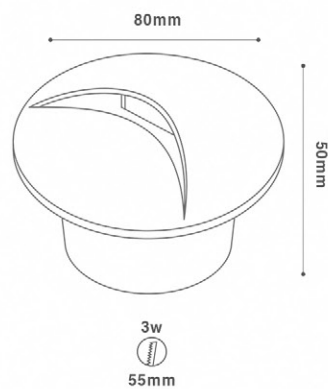

COLOR TEMPERATURE

3K

POWER

3w

BODY COLOUR

White

DIMENSION

80*50mm

CUTOUT

55mm



MODERN WARM WHITE LED LIGHTING

A modern rooftop terrace at night, featuring a wooden deck, a dark metal railing, and a view of a city skyline. The terrace is illuminated by three recessed ceiling lights and a series of small, warm-toned lights along the edge of a planter box filled with greenery. A large potted plant stands against a dark wall, and a contemporary armchair with a grey cushion is positioned near a small black side table with a lit candle. A glass door on the right leads into a warmly lit interior space with a sofa and a framed abstract painting.

PRECISION SURFACE LIGHT FITTING



TLC - 089

LED:  bridgeLux

DRIVER: Importend HPF

CCT: 3000K | 4000K

LUMENS OUTPUT: 120 LM/W

LENS: Imported


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 40°

CRI: 80

INPUT VOLTAGE: 220V-240V AC

POWER FACTOR: >0.95

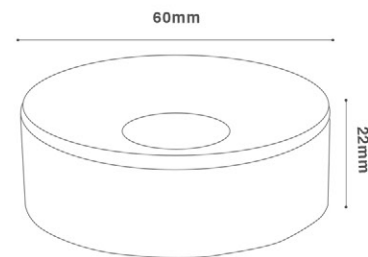

COLOR TEMPERATURE

3K 4K

POWER

5w

BODY COLOUR

White / Black

DIMENSION (Outer X Height)

60 x 22mm



MAGNETIC RANGE

This interior lighting concept demonstrates how magnetic track lighting transforms architectural spaces through flexibility and control. The result is a seamless blend of functionality and aesthetics, ideal for offices, studios, galleries, and high-end interiors.



MAGNETIC LAZER

LED: **OSRAM**

DRIVER: Imported

CCT: 3000K | 4000K | Tunable

LUMENS OUTPUT: 120-130 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 80 / 90

INPUT VOLTAGE: 48V Dc

POWER FACTOR: >0.90

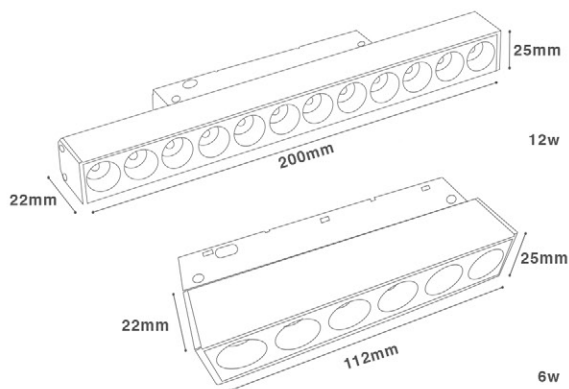

POWER	BODY COLOUR	DIMENSION
6w	Black	112X22X25mm
12w	Black	225X22X25mm



MAGNETIC MOVEABLE

LED: **bridgelux** / **OSRAM**

DRIVER: Tirich

CCT: 3000K | 4000K

LUMENS OUTPUT: 130-140 LM/W



MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

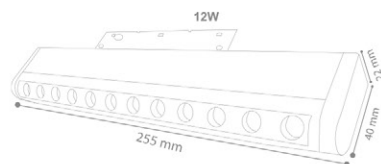

POWER	BODY COLOUR	DIMENSION
6w	Black	132X22X40
12w	Black	255X22X40



TRACK

LED: **OSRAM**

DRIVER: Imported

CCT: 3000K | 4000K | Tunable

LUMENS OUTPUT: 120-130 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 90

INPUT VOLTAGE: 48V Dc

POWER FACTOR: >0.90

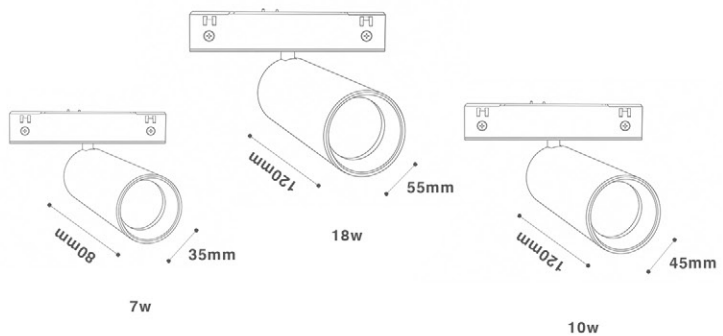

POWER	BODY COLOUR	DIMENSION
7w	Black	35X80
10w	Black	45X100
18w	Black	55X120



PRECISION BEAM. PREMIUM FINISH.



CASET LAZER

LED: **OSRAM**

DRIVER: Imported

CCT: 3000K | 4000K | Tunable

LUMENS OUTPUT: 120-130 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 80 / 90

INPUT VOLTAGE: 48V Dc

POWER FACTOR: >0.90

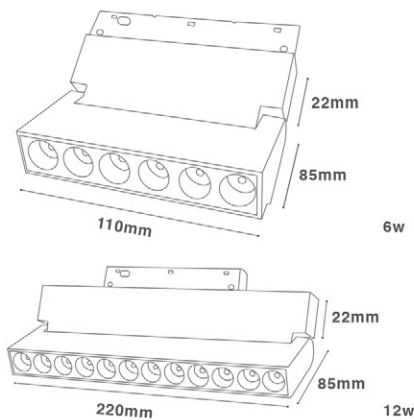

POWER	BODY COLOUR	DIMENSION
6w	Black	110X22X85
12w	Black	225X22X85



PROFILE

LED: **bridgelux** / **OSRAM**

DRIVER: Imported

CCT: 3000K | 4000K | Tunable

LUMENS OUTPUT: 120-130 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°

CRI: 80 / 90

INPUT VOLTAGE: 48V Dc

POWER FACTOR: >0.90

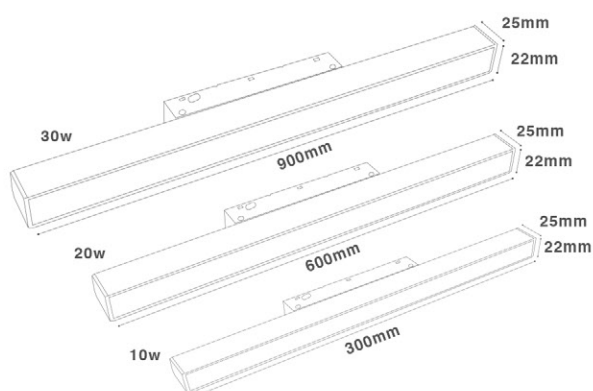

POWER	BODY COLOUR	DIMENSION
10w	Black	300X22X25
20w	Black	600X22X25
30w	Black	900X22X25

ARCHITECTURAL BEDSIDE LIGHTING



HANGING LIGHT

LED:  / **OSRAM**

DRIVER: Importend HPF

CCT: 4000K

LUMENS OUTPUT: 120 LM/W

REFLECTOR: Shinland

MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 80

INPUT VOLTAGE: 48V Dc

POWER FACTOR: >0.95

POWER	BODY COLOUR	DIMENSION
5w	Black	32 x 250mm



PROFILE WALL WASHER

LED: **OSRAM**

DRIVER: Imported HPF

CCT: 4000K

LUMENS OUTPUT: 120 LM/W

DIFFUSER: Yongtek


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°


CRI: 80

INPUT VOLTAGE: 48V Dc

POWER FACTOR: >0.95



POWER	BODY COLOUR	DIMENSION
7w	Black	72 x 30mm



L CORNER

LED: **OSRAM**

DRIVER: Importend HPF

CCT: 4000K

LUMENS OUTPUT: 120 LM/W

DIFFUSER: Yongtek


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°

CRI: 80

INPUT VOLTAGE: 48V Dc

POWER FACTOR: >0.95

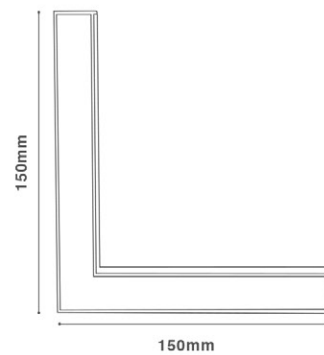

POWER	BODY COLOUR	DIMENSION
12w	Black	150 x 150mm


ACCESSORIES

Curveel Corner



Track Rail

1 MTR
2 MTR
I JOINTER
L JOINTER
T JOINTER

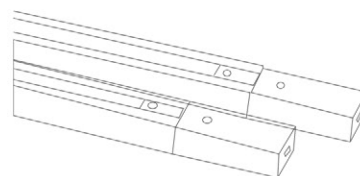

COLOR TEMPERATURE

3K 4K 5K 6K



Tunable




Dimmable



BODY COLOUR : WHITE / BLACK

Power Supply

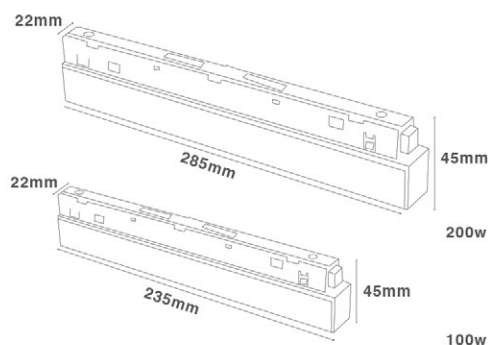


ACCESSORIES

Smart Remote



Council Corner

Council Corner

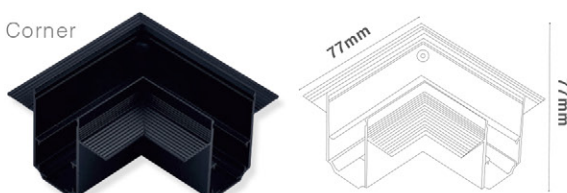


Input Connector




Jointer



Double Connector /
Right Angle Joiner

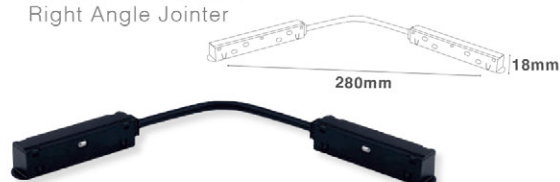

Magnetic Chennel



MODEL	BODY COLOUR	DIMENSION
COUNCIL TRACK	Black	35 MM
SURFACE TRACK	Black	



10MM MEGNETIC

A modern linear pendant with adjustable cylindrical spot modules delivering focused task lighting over the kitchen island. Its minimalist matte-black geometry blends seamlessly into contemporary interiors, offering uniform light, glare control, and directional flexibility—ideal for kitchens, workspaces, and open-plan living environments."



CYLINDER

LED: **OSRAM**

DRIVER: Imported HPF

CCT: 3000K | 4000K

LUMENS OUTPUT: 120 LM/W

LENS: GR Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 36°

CRI: 80

INPUT VOLTAGE: 48V Dc

POWER FACTOR: >0.95

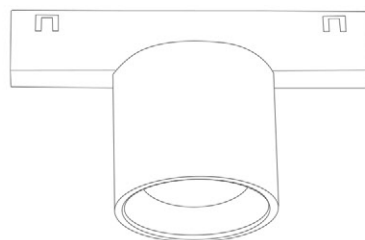

POWER	BODY COLOUR	DIMENSION
7w	Black	72 x 55mm



10Z CASETLZR

LED: **bridgelux**

DRIVER: Importend HPF

CCT: 3000K | 4000K

LUMENS OUTPUT: 130 LM/W


MATERIAL: Aluminium Die Costing

BEAM ANGLE: 36°

CRI: 80

INPUT VOLTAGE: 48V AC

POWER FACTOR: Comman

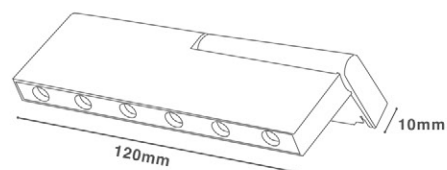

POWER	BODY COLOUR	DIMENSION
5w	Black	120 x 10x16mm



10Z PFL (PROFILE)

LED: **bridgelux**

DRIVER: Importend HPF

CCT: 3000K | 4000K

LUMENS OUTPUT: 130 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110*

CRI: 80

INPUT VOLTAGE: 48V AC

POWER FACTOR: >0.95

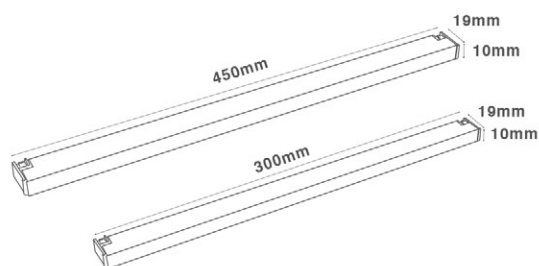


POWER	BODY COLOUR	DIMENSION
8w	Black	300 x 10x19mm
12w	Black	450 x 10 x19mm



10Z LZR (LAZER)

LED: 
DRIVER: Importend HPF
CCT: 3000K | 4000K
LUMENS OUTPUT: 130 LM/W
REFLECTOR: Darkoo
MATERIAL: Aluminium Die Casting
BEAM ANGLE: 36°
CRI: 80
INPUT VOLTAGE: 48V AC
POWER FACTOR: >0.95

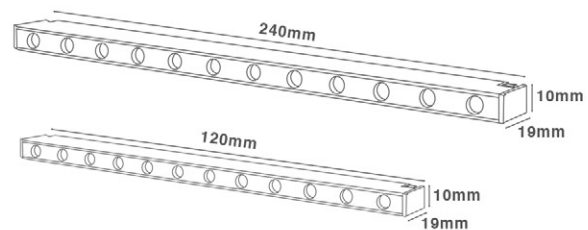

Tunable




Dimmable

POWER	BODY COLOUR	DIMENSION
5w	Black	120x10x19mm
10w	Black	240x10x19mm



10Z TRACK

LED:  **bridge**lux
DRIVER: Importend HPF
CCT: 3000K | 4000K
LUMENS OUTPUT: 130 LM/W
REFLECTOR: Shinland
MATERIAL: Aluminium Die Casting
BEAM ANGLE: 36°
CRI: 80
INPUT VOLTAGE: 48V AC
POWER FACTOR: 0.95

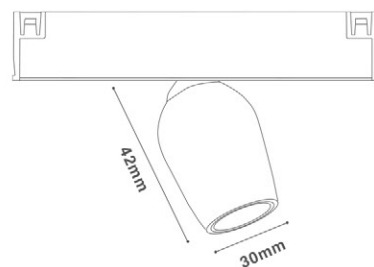


POWER	BODY COLOUR	DIMENSION
3w	Black	30x42mm

A photograph of a Buddhist altar. In the center, a dark-colored Buddha statue sits in a meditative pose on a dark wooden table. The statue holds a small, lit candle in its hands. Behind the statue is a large, circular, golden relief sculpture depicting a lotus pond with several blooming lotus flowers. Two black spotlights are mounted on a track above the altar, casting a warm, focused light on the Buddha statue and the golden relief. The entire scene is framed by a dark wooden archway. The floor is made of light-colored tiles, and the walls are a neutral, light beige color. The overall atmosphere is peaceful and spiritual.


PRECISION LIGHTING FOR SPIRITUAL SPACES

ACCESSORIES

10Z Corner

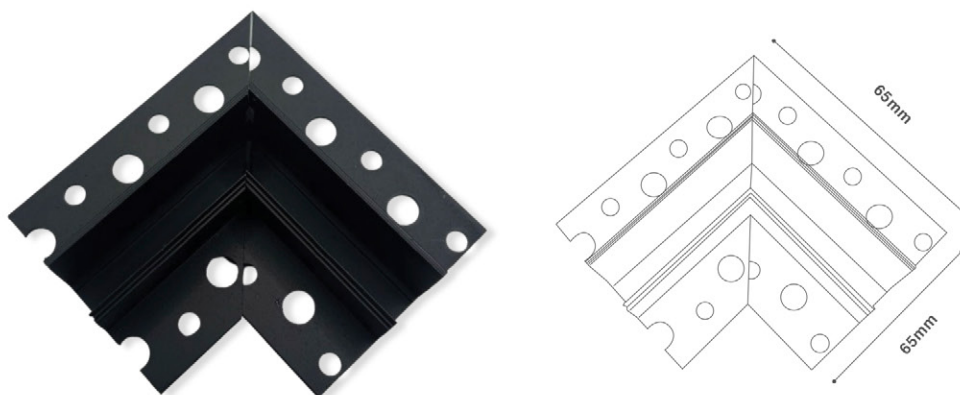


10Z Connector

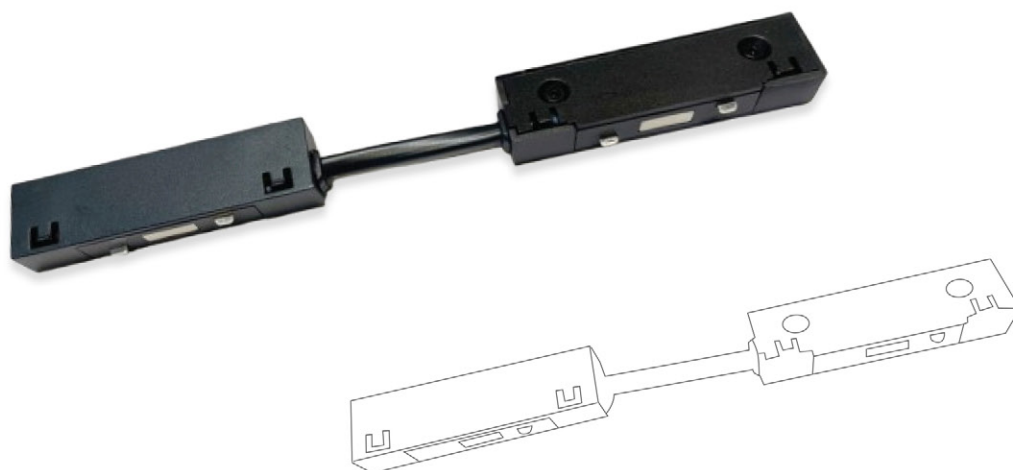


ACCESSORIES

10Z Track

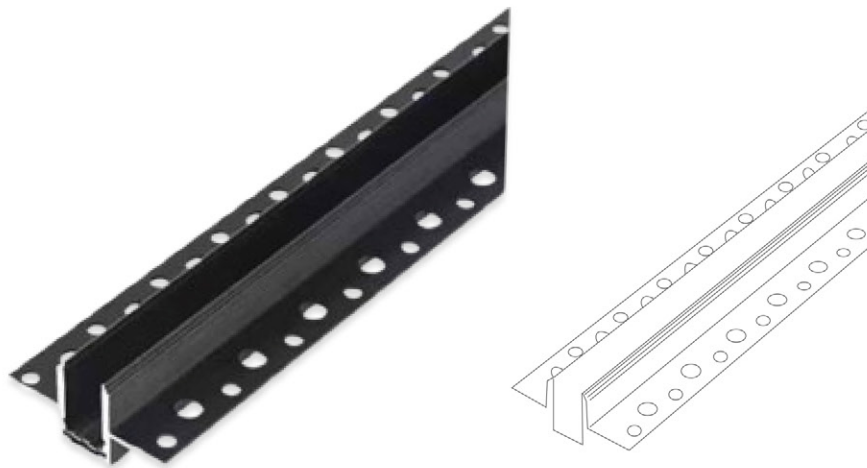


10Z Supply

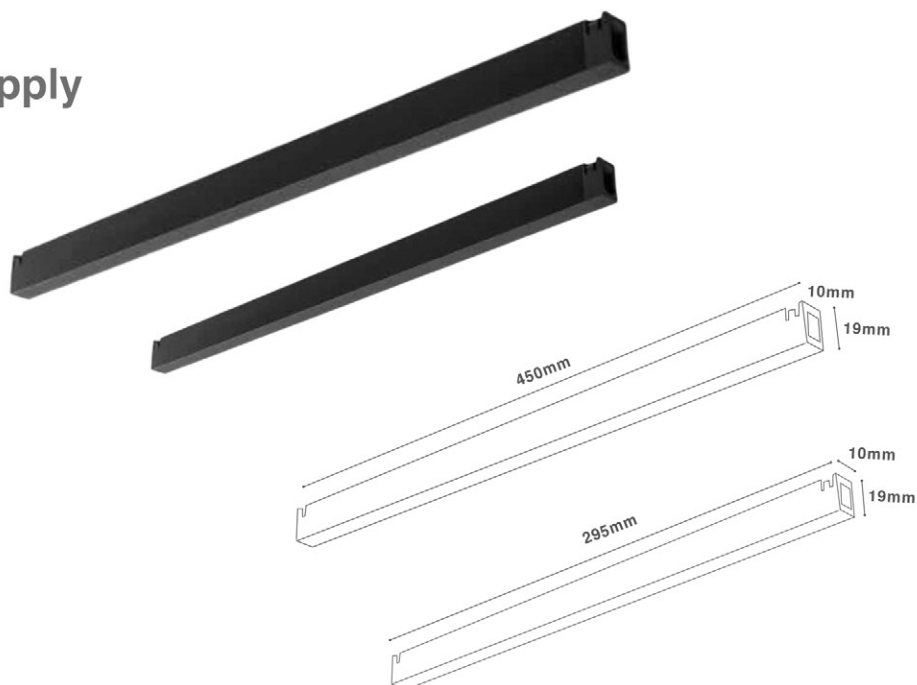



LUXURY OUTDOOR LIGHT

Designed to elevate modern exteriors, TIRICH LED outdoor wall lights blend sharp geometry with refined illumination. Crafted in a matte-black finish, these lights add depth, drama, and architectural character after dark.

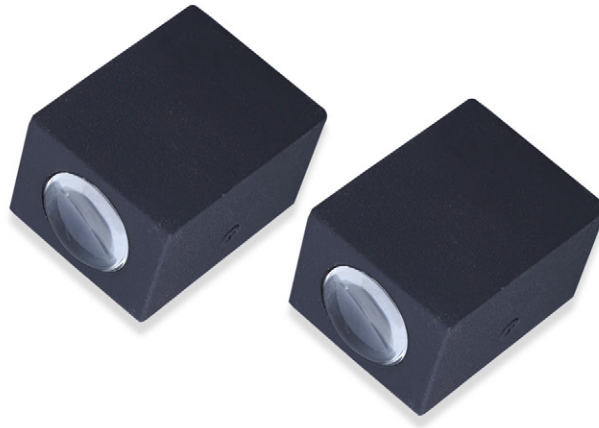

TLC 211 & TLC 212 (1 & 2 Way Out Door)

LED: bridge**lux**

DRIVER: Imported

CCT: 3000K

LUMENS OUTPUT: 110-120 LM/W

LENS: Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80

INPUT VOLTAGE: 150-240 Vac 50 Hz



POWER FACTOR: >0.90

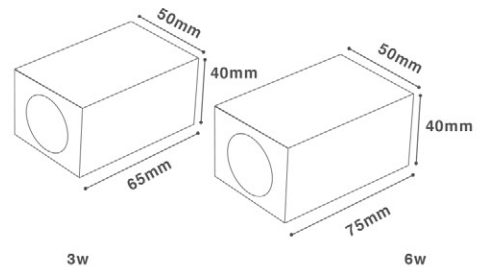

COLOR TEMPERATURE

3K

POWER	BODY COLOUR	DIMENSION (L X W X H)
3w	Grey	65X50X40mm
6W	Grey	75x50x40mm



TLC - 213 / 214 / 215

LED: *bridgelux*

DRIVER: Imported

CCT: 3000k

LUMENS OUTPUT: 110-120 LM/W

LENS: Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

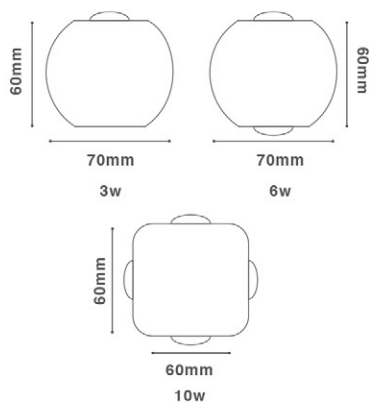

COLOR TEMPERATURE

3K

POWER

BODY COLOUR

DIMENSION
(Outer X Height)

3w

Grey

60*70mm

6w

Grey

60*70mm


10w

Grey

60*60mm

ELEGANT GLOW, LUXURY OUTDOOR LIGHTING



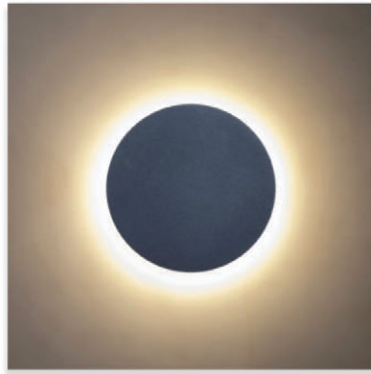

TLC - 217

LED: *bridgelux*

DRIVER: Imported

CCT: 3000k


LUMENS OUTPUT: 110-120 LM/W

CRI: 80

MATERIAL: Aluminium Die Casting

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

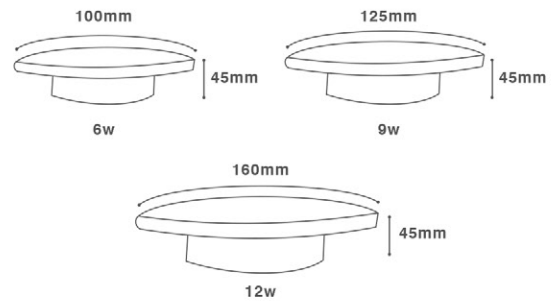

COLOR TEMPERATURE



Tunable

Dimmable

POWER

6w

9w

12w

BODY COLOUR

Grey

Grey

Grey

DIMENSION (Diameter x H)

100*45mm

125*45mm

160*45mm



TLC 218 (FLOOD LIGHT)

LED: **bridge**lux / **OSRAM**

DRIVER: Imported

CCT: 3000k | 4000k | 6000k

LUMENS OUTPUT: 120-130 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 120*

CRI: 80

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

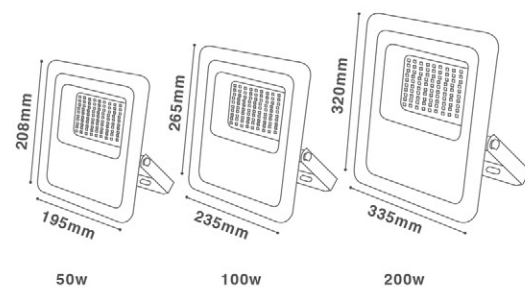

COLOR TEMPERATURE

3K 4K 6K

POWER

50w

100W

200W

BODY COLOUR

Grey

Grey

Grey

DIMENSION (L X W X H)

165*185*40mm

189*280*40mm

183*280*140mm



TLC 219

LED: **bridgelux** / **OSRAM**

DRIVER: Imported

CCT: 3000k | 4000k | 6000k

LUMENS OUTPUT: 110-120 LM/W

LENS: Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 120°

CRI: 80

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

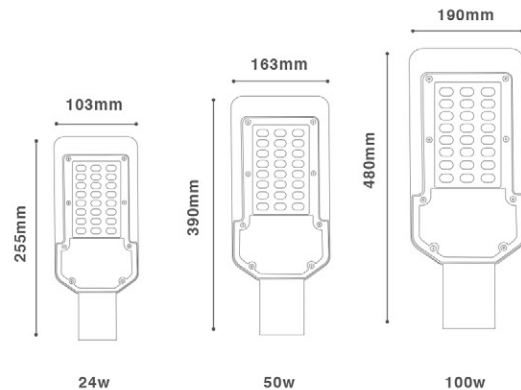

COLOR TEMPERATURE

3K 4K 6K

POWER	BODY COLOUR	DIMENSION (L X W)	HEIGHT
24w	Grey	255*103mm	43mm
50w	Grey	390*163mm	50mm
100w	Grey	480*190mm	70mm

WHERE NIGHT MEETS ELEGANT GLOW.

TIRICH LED Outdoor Spike Light transforms garden pathways into warm, inviting experiences. Its focused beam highlights greenery and walkways with precision and elegance.





TLC 221 (SPIKE LIGHT)

LED: **bridgelux**

DRIVER: Imported

CCT: 3000k | 4000k | 6000k | Red | Green | Blue

LUMENS OUTPUT: 110-120 LM/W

REFLECTOR: Optics


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

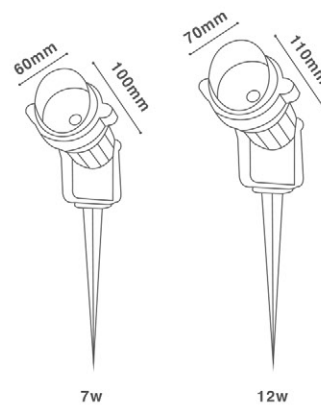

COLOR TEMPERATURE

3K 4K 6K

RED GREEN BLUE
RED GREEN BLUE

POWER BODY COLOUR DIMENSION

7w	Grey	60*100mm
12w	Grey	70*110mm



TLC -222

LED: **bridgelux**

DRIVER: Imported

CCT: 3000k

LUMENS OUTPUT: 120-130 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110*

CRI: 80

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90



POWER	BODY COLOUR	DIMENSION	HEIGHT
6w	Grey	115X115X28mm	28mm



TLC 223

LED: *bridgelux*

DRIVER: Tirich

CCT: 3000k

LUMENS OUTPUT: 130-140 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

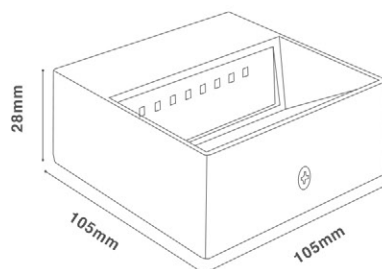

POWER	BODY COLOUR	DIMENSION	HEIGHT
6w	Grey	105X105X28	28mm



PRO-224

LED: **bridgelux**

DRIVER: Tirich

CCT: 3000k

LUMENS OUTPUT: 130-140


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110*


CRI: 80 / 90

INPUT VOLTAGE: 150-240 V

POWER FACTOR: >0.90



8w



6w

POWER	BODY COLOUR	DIMENSION	HEIGHT
6w	Grey / Black	60x90x34	34mm
8w	Grey / Black	70x150x34	34mm

EVERY STEP, PERFECTLY ILLUMINATED.

TIRICH LED Outdoor Steps Light brings elegance and safety together in one refined design. Its soft warm glow highlights every step with precision, creating a welcoming pathway at night.





TLC - 216

LED: **bridgelux**

DRIVER: Tirich

CCT: 3000K

LUMENS OUTPUT: 130-140 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 110°


CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90



4w



150mm

8w

COLOR TEMPERATURE

3K

POWER

BODY COLOUR

DIMENSION
(L X W X H)

4w


Grey

95*70mm

8W

Grey

150*70mm

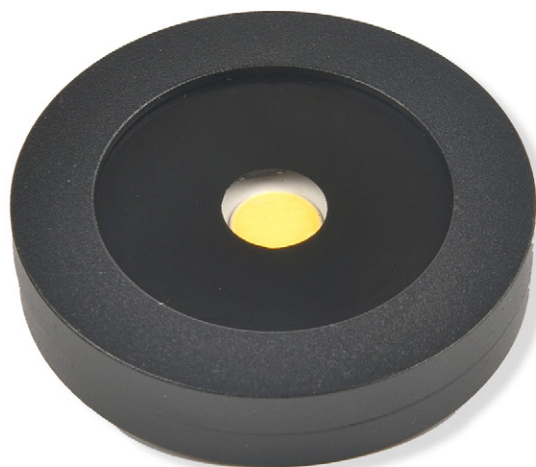

TLC - 220

LED: **bridgelux**

CCT: 3000k

LUMENS OUTPUT: 130-140 LM/W


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38°

CRI: 80 / 90

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.90

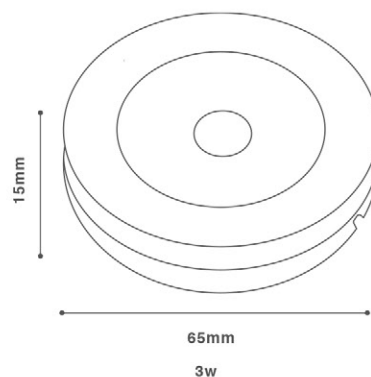

COLOR TEMPERATURE

3K

POWER

3w

BODY COLOUR

Black

DIMENSION

65*15mm



PRO-227

LED: **CREE** 

DRIVER: Impotent

CCT: 3000k | 4000k | 6000k

LUMENS OUTPUT: 130-140 LM/W

DIFFUSER: Shinland


MATERIAL: Aluminium Die Casting

BEAM ANGLE: 38*

CRI: 80 / 97

INPUT VOLTAGE: 150-240 Vac 50 Hz

POWER FACTOR: >0.97



COLOR TEMPERATURE

3K 4K 5K 6K

POWER

3w

7w

12w

BODY COLOUR

Gray

Gray

Gray



ELEGANT ILLUMINATION FOR EVERY OUTDOOR PATH.

TIRICH LIGHTING COMPANY

Plot No. 88-89, Jeet Industries, Nr. Rayka Circle,
Udhna, Surat - 394210. Gujrat. india.

Contact No, - +91 87990 25086 I +9173832 47625
salesstirichled@gmail.com